



# Cool In


Sun protection privacy film Internal

SKU: RU1571


**GSW® Cool In UV window film carefully applied to glass absorbs ultraviolet rays and light from the sun and moon extremely effectively. (285% to 385% nm) This film protects furniture and objects indoors from sunlight and moonlight.**

**Features:**

- Blocks UV protection High.
- Delayed discoloration.
- Blocks UVA and UVB.
- Glass and your interior will have a longer lifespan.
- Almost Transparent.
- View on both sides.

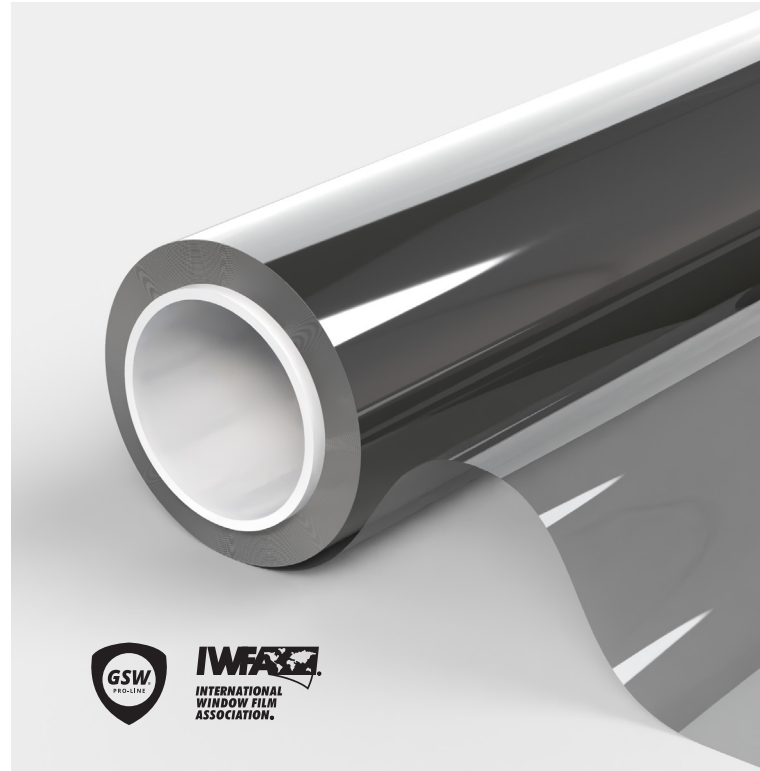

PRODUCT PERFORMANCE	
UV protection	99.5%
Light transmission	66%
Reflection of visible light outside	11%
Reflection of visible light inside	11%
Reflection of solar energy	18%
Absorption of solar energy	26%
Transmission of solar energy	56%
Reduction of reflection	28%
Sun transmission	58%
Rejected solar energy single glazing	40%
Rejected solar energy double glazing	42%
G-value	0.59
U-value single	5.8
U-value double	
Shade coefficient	0.7

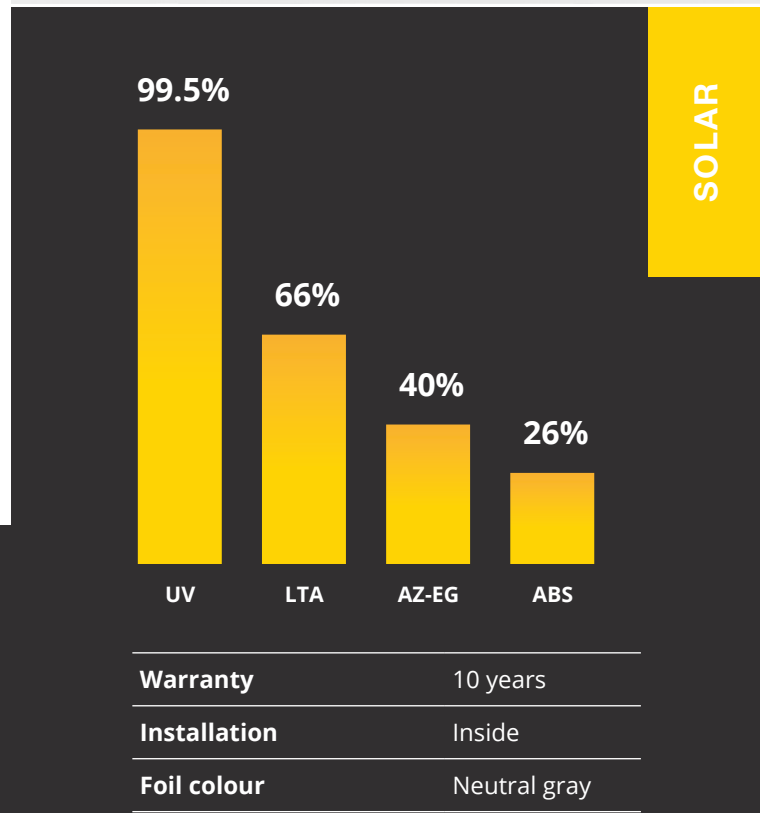

**PROFESSIONAL WINDOWFILM**  
 VISIT [GSWFILM.COM](http://GSWFILM.COM)

Contact sales +31 (0)299-323122 [info@gswfilm.com](mailto:info@gswfilm.com)

# Cool In

## Sun protection privacy film Internal

SKU: RU1571

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	Yes
Stadip ext. clear double pane	Yes
Stadip int. clear double pane	NB!
Triple glazed	No
Acrylic 4 mm	Yes
Polycarbonate 4 mm	No

PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	30 meters
Film thickness	50 μ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	

\*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.

### U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

### Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

### Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!



1. Hard scratch-resistant layer for long life and ease of maintenance when cleaning the windows.
2. Optically high-quality polyester, with metal particles against IR radiation.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

**PROFESSIONAL WINDOWFILM**  
VISIT **GSWFILM.COM**

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (\*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



**FREE SAMPLE**