



Eco Windowfilm 20


Insulating window film.

SKU: RS1577

The sputtered polyester GSW® Eco Windowfilm series window film consists of several metal layers and provides thermal insulation. In summer, excessive heat does not enter through the glass and in winter heat loss is limited. So a lower U-value. When this insulating high-efficiency window film is applied to your windows, it provides significant cost savings for heating and air conditioning, quickly recouping the initial costs of purchase and installation.

Features:


- Positive Insulating function.
- Also keeps your energy costs low.
- Privacy during the day.
- Limitation of double glazing heat loss 50%.
- Sun protection during warm periods.
- UV werend voor uw interieur.

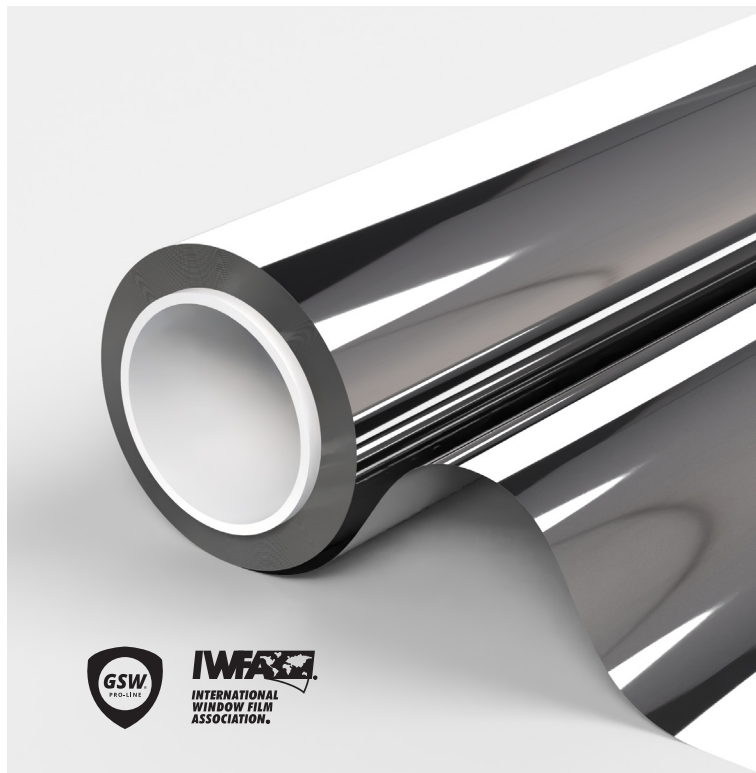

SOLAR

PRODUCT PERFORMANCE

UV protection	99%
Light transmission	15%
Reflection of visible light outside	55%
Reflection of visible light inside	55%
Reflection of solar energy	50%
Absorption of solar energy	40%
Transmission of solar energy	10%
Reduction of reflection	82%
Sun transmission	26%
Rejected solar energy single glazing	74%
Rejected solar energy double glazing	78%
G-value	0.35
U-value single	4.27
U-value double	2.25
Shade coefficient	0.2

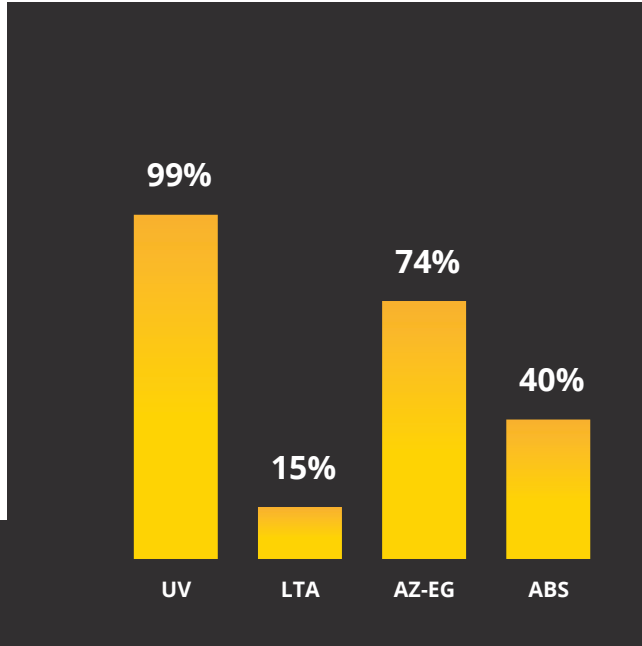

Warranty	6 years
Installation	Inside
Foil colour	Silver

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com

Eco Windowfilm 20

Insulating window film.

SKU: RS1577

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	No
Reflective tinted double pane	No
Gas-filled double pane - Low E	No
Stadip ext. clear double pane	No
Stadip int. clear double pane	No
Triple glazed	No
Acrylic 4 mm	Yes
Polycarbonate 4 mm	No

PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	30 meters
Film thickness	50 μ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!


Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.

U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

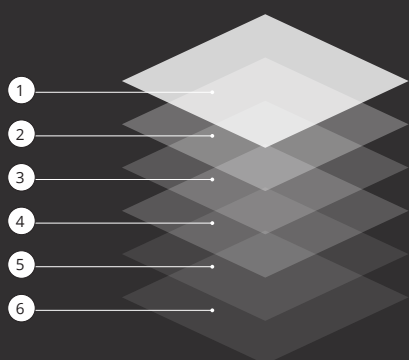

1. Hard scratch-resistant layer for a long lifespan and ease of maintenance when cleaning the windows.
2. Optical high-quality polyester, with metal particles against IR radiation.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

PROFESSIONAL WINDOWFILM
VISIT **GSWFILM.COM**

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE