



Ice Cool 70


Sun protection privacy film Internal

SKU: RZ1522

GSW® Ice Cool 70 window film is developed with the latest Nano technologies. A ceramic compound is incorporated that limits heating by the sun and maintains transparency.


Features:

- Blocks low infrared.
- Almost transparent.
- Ideal for monumental buildings and display windows.
- Glass will have a longer lifespan.
- Allows a lot of light to pass through.
- Also suitable for vehicles and vessels.

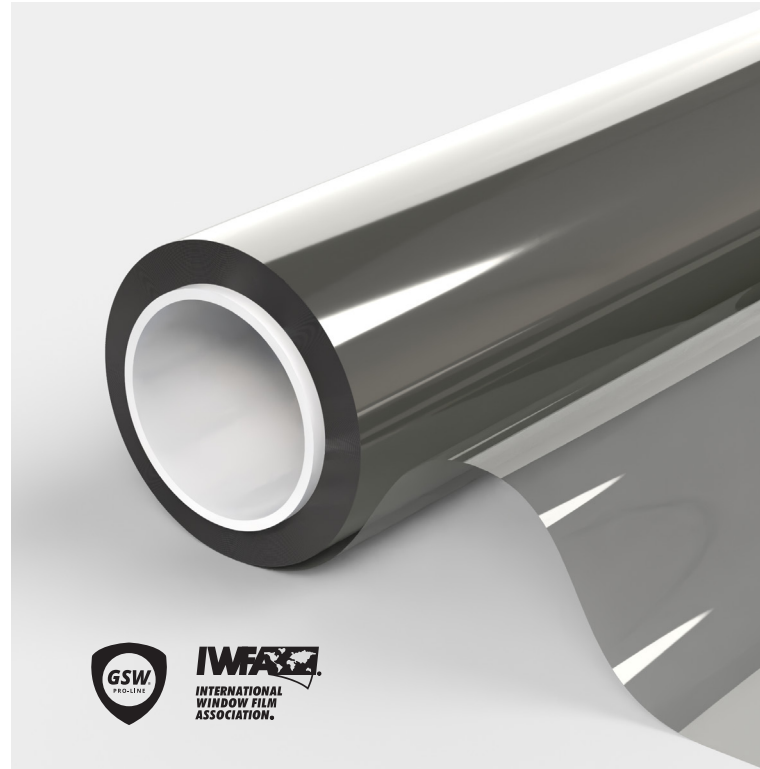

PRODUCT PERFORMANCE

UV protection	99%
Light transmission	70%
Reflection of visible light outside	7%
Reflection of visible light inside	7%
Reflection of solar energy	27%
Absorption of solar energy	26%
Transmission of solar energy	47%
Reduction of reflection	20%
Sun transmission	51%
Rejected solar energy single glazing	45%
Rejected solar energy double glazing	49%
G-value	0.49
U-value single	4.9
U-value double	
Shade coefficient	0.5

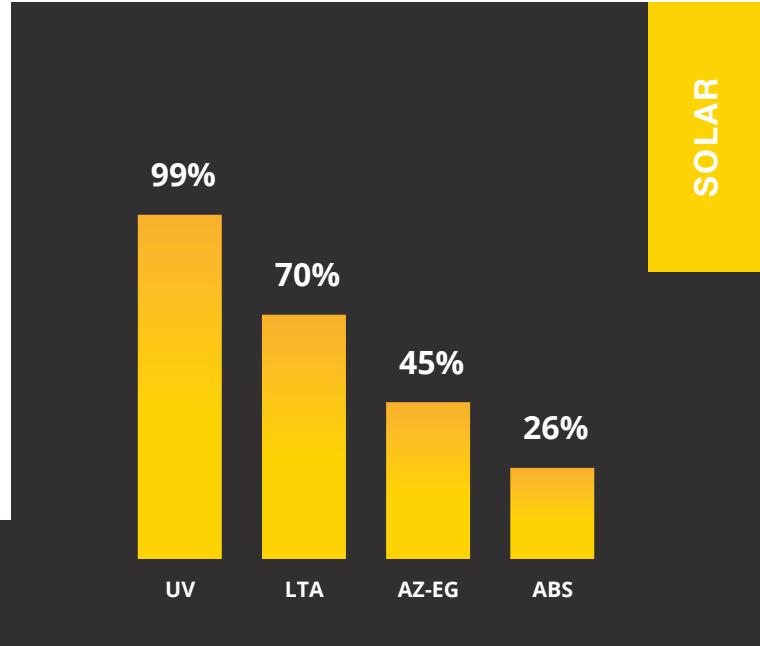

Warranty	10 years
Installation	Inside
Foil colour	Light Champagne

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com

Ice Cool 70

Sun protection privacy film Internal

SKU: RZ1522

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	No
Tinted double pane	No
Reflective tinted double pane	No
Gas-filled double pane - Low E	No
Stadip ext. clear double pane	No
Stadip int. clear double pane	No
Triple glazed	No
Acrylic 4 mm	Yes
Polycarbonate 4 mm	No

PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	30 meters
Film thickness	40 μ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.

U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.



1. Hard scratch-resistant layer for long life and ease of maintenance when cleaning the windows.
2. Optically high-quality polyester, with metal particles against IR radiation.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation

PROFESSIONAL WINDOWFILM
VISIT **GSWFILM.COM**

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE