



# Ice Cool 78 Super Plus Extern


Sun protection privacy film External.

SKU: REZ1527


**GSW® Ice Cool 78 Super Plus External window film is developed with the latest Nano technologies. A ceramic compound is incorporated that limits heating by the sun and maintains transparency.**

**Features:**

- Blocks infrared moderately.
- Almost transparent.
- Ideal for monumental buildings and display windows.
- Glass will have a longer lifespan.
- Allows a lot of light to pass through.
- The latest technology.

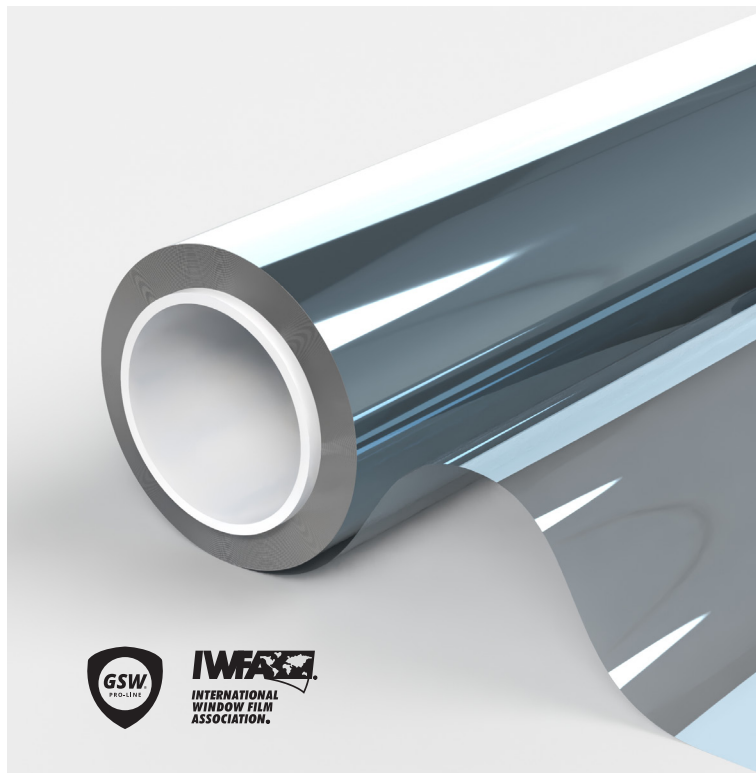

PRODUCT PERFORMANCE	
UV protection	99%
Light transmission	75%
Reflection of visible light outside	8%
Reflection of visible light inside	8%
Reflection of solar energy	6%
Absorption of solar energy	53%
Transmission of solar energy	41%
Reduction of reflection	29%
Sun transmission	41%
Rejected solar energy single glazing	56%
Rejected solar energy double glazing	59%
G-value	0.49
U-value single	5.8
U-value double	
Shade coefficient	0.6

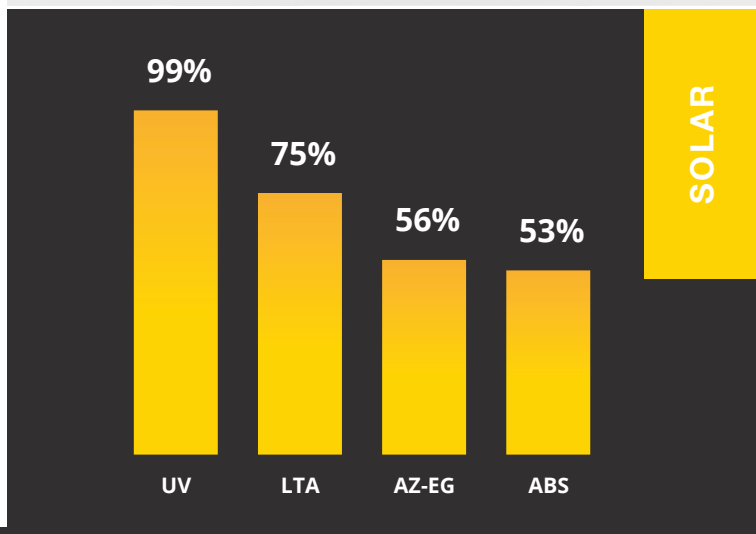

Warranty vertical*	10 years
Warranty horizontal*	no
Installation	outside
Foil colour	Neutral
Foil colour inside	

\* Window film under cover strip or use tested Bloem® sealing products.

**PROFESSIONAL WINDOWFILM**  
**VISIT [GSWFILM.COM](http://GSWFILM.COM)**

Contact sales +31 (0)299-323122 [info@gswfilm.com](mailto:info@gswfilm.com)

# Ice Cool 78 Super Plus Extern

Sun protection privacy film External.

SKU: REZ1527

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	NB !
Reflective tinted single pane	Yes
Clear double pane	NB !
Tinted double pane	NB !
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	NB !
Stadip ext. clear double pane	No
Stadip int. clear double pane	Yes
Triple glazed	no
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	152 and 183 cm
Length(s)	30 meters
Film thickness	75 μ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to +40 °C
Fire class	EN13501-1
Manufacturer	

## Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

## Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

\*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.

## U-value

The lower the U-value, the better the thermal resistance of the window film, meaning less heat is lost to the outside.



1. Hard scratch-resistant layer for long life and ease of maintenance when cleaning the windows.
2. Optically high-quality polyester, with metal particles against IR radiation.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

**PROFESSIONAL WINDOWFILM**  
VISIT [GSWFILM.COM](http://GSWFILM.COM)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (\*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE