



# Sp Bronze 35


Sun protection privacy film Internal

SKU: RZ1512

**GSW® Sp Bronze 35 sputtered window film keeps solar heat to a minimum and at the same time guarantees a maximum of natural light. This type of film offers effective protection against the reflection of sunlight and gives buildings color and originality.**


**Features:**

- Blocks infrared Normal.
- Creates an attractive appearance on the facade.
- Minimum privacy screen allows more light to pass through.
- Glass gets a longer lifespan.
- Bronze glass look.
- View from inside to outside.

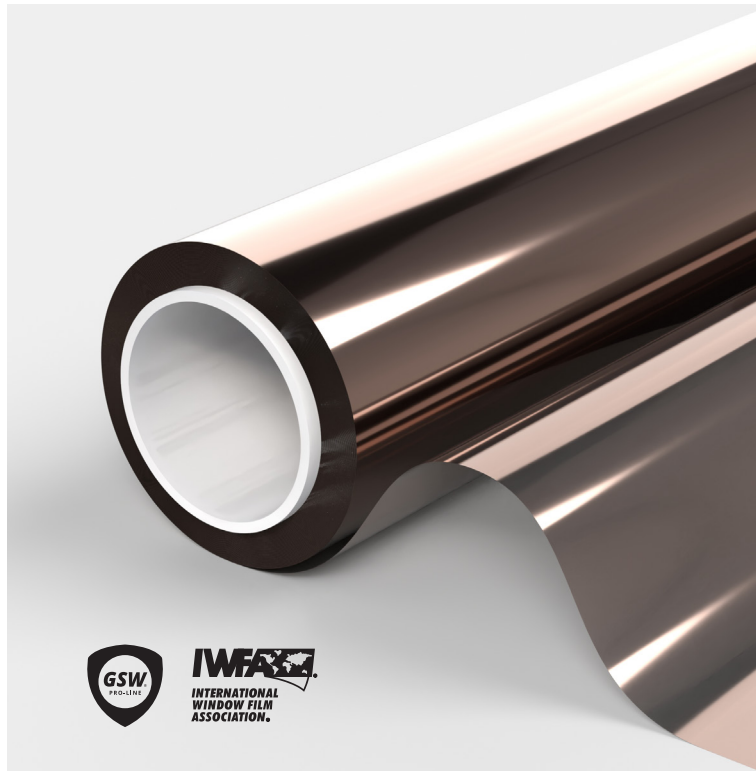

**PRODUCT PERFORMANCE**

|                                      |      |
|--------------------------------------|------|
| UV protection                        | 99%  |
| Light transmission                   | 35%  |
| Reflection of visible light outside  | 26%  |
| Reflection of visible light inside   | 26%  |
| Reflection of solar energy           | 36%  |
| Absorption of solar energy           | 39%  |
| Transmission of solar energy         | 25%  |
| Reduction of reflection              | 63%  |
| Sun transmission                     | 35%  |
| Rejected solar energy single glazing | 60%  |
| Rejected solar energy double glazing | 65%  |
| G-value                              | 0.34 |
| U-value single                       | 5.23 |
| U-value double                       |      |
| Shade coefficient                    | 0.39 |

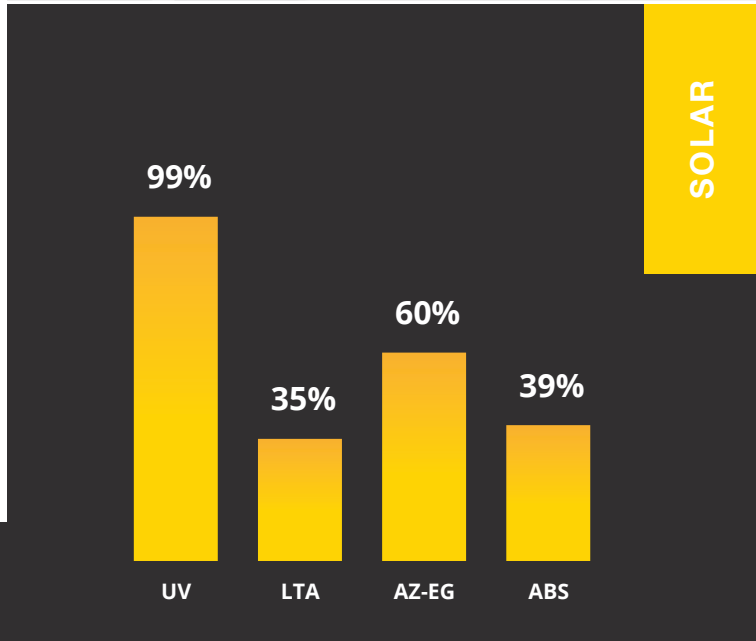

|              |               |
|--------------|---------------|
| Warranty     | 10 years      |
| Installation | Inside        |
| Foil colour  | Medium Bronze |

**PROFESSIONAL WINDOWFILM**  
**VISIT [GSWFILM.COM](http://GSWFILM.COM)**

Contact sales +31 (0)299-323122 [info@gswfilm.com](mailto:info@gswfilm.com)

**SOLAR**

# Sp Bronze 35

Sun protection privacy film Internal

SKU: RZ1512

| GLASS TYPES                    | SUITABLE |
|--------------------------------|----------|
| Clear single pane              | Yes      |
| Tinted single pane             | Yes      |
| Reflective tinted single pane  | Yes      |
| Clear double pane              | Yes      |
| Tinted double pane             | No       |
| Reflective tinted double pane  | No       |
| Gas-filled double pane - Low E | No       |
| Stadip ext. clear double pane  | No       |
| Stadip int. clear double pane  | No       |
| Triple glazed                  | No       |
| Acrylic 4 mm                   | Yes      |
| Polycarbonate 4 mm             | No       |

| PRODUCT FEATURES    |                  |
|---------------------|------------------|
| Width(s)            | 152 cm           |
| Length(s)           | 30 meters        |
| Film thickness      | 50 μ             |
| Material            | PET              |
| Storage period      | 3 years          |
| Storage temperature | -5 °C to '+40 °C |
| Fire class          | EN13501-1        |
| Manufacturer        |                  |

### Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

### Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

\*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.

### U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.



1. Hard scratch-resistant layer for long life and ease of maintenance when cleaning the windows.
2. Optically high-quality polyester, with metal particles against IR radiation.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

**PROFESSIONAL WINDOWFILM**  
VISIT **GSWFILM.COM**

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (\*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



**FREE SAMPLE**