



UV Gard Plus


Sun protection privacy film Internal

SKU: RU1572


GSW® UV Gard Plus carefully applied to each glazing completely absorbs ultraviolet rays, but also the light of the Sun or the Moon up to 420 Nm (+ 90%). It therefore significantly reduces the ageing and discolouration of exposed items or furniture and represents our best protection for shop windows.

Features:

- Blocks UV protection Extremely High.
- Delayed discoloration.
- Blocks UVA, UVB and UVC.
- Glass and your interior will have a longer lifespan.
- Almost Transparent.
- View on both sides.

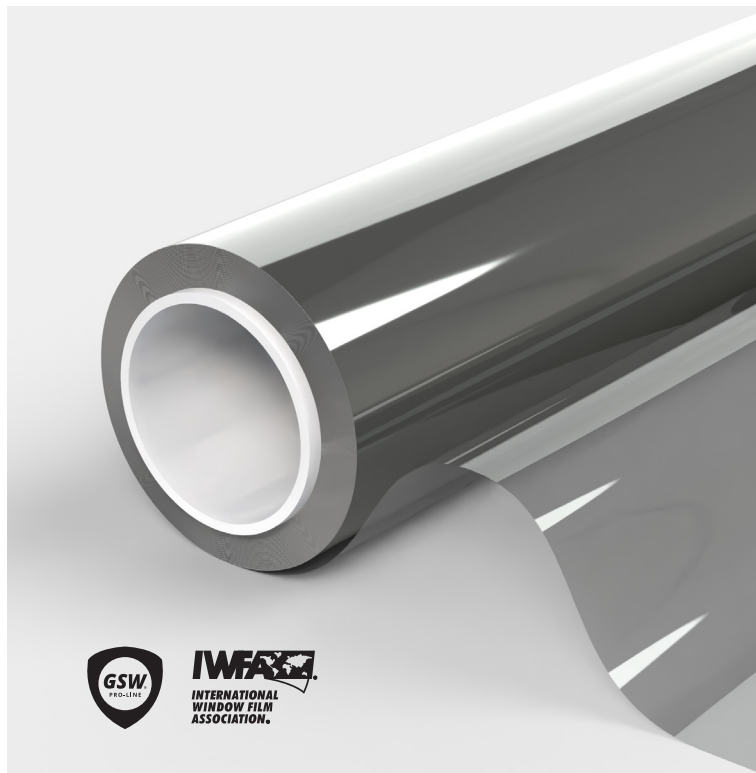

PRODUCT PERFORMANCE	
UV protection	99.8%
Light transmission	70%
Reflection of visible light outside	10%
Reflection of visible light inside	11%
Reflection of solar energy	9%
Absorption of solar energy	35%
Transmission of solar energy	56%
Reduction of reflection	31%
Sun transmission	58%
Rejected solar energy single glazing	40%
Rejected solar energy double glazing	42%
G-value	0.59
U-value single	5.8
U-value double	
Shade coefficient	0.7

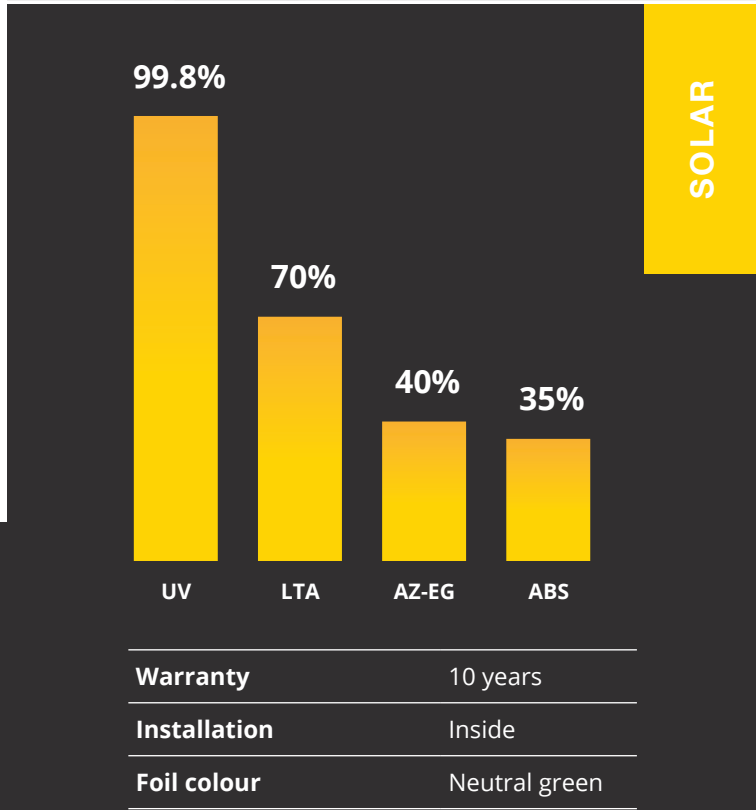

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com

UV Gard Plus

Sun protection privacy film Internal

SKU: RU1572

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	Yes
Stadip ext. clear double pane	Yes
Stadip int. clear double pane	No
Triple glazed	No
Acrylic 4 mm	Yes
Polycarbonate 4 mm	No

PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	30 meters
Film thickness	50 μ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	

*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.

U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!



1. Hard scratch-resistant layer for long life and ease of maintenance when cleaning the windows.
2. Optically high-quality polyester, with metal particles against IR radiation.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE