



RS 20 Super Plus Extern

Sun protection privacy film External.

SKU: REZ1809


Global® RS 20 Super Plus Externally, sun protection is kept to a minimum and at the same time a maximum of natural light incidence is guaranteed. Light reflection is significantly reduced and because the film functions as a one-way mirror, you have no view in and the outside of a house or building gets a modern look.

Features:

- Blocks infrared Extreme.
- Creates an attractive appearance on the facade.
- Ideal against prying eyes during the day.
- Glass will have a longer lifespan.
- Silver glass look.
- The latest technology.

PRODUCT PERFORMANCE

UV protection	99%
Light transmission	16%
Reflection of visible light outside	72%
Reflection of visible light inside	69%
Reflection of solar energy	72%
Absorption of solar energy	18%
Transmission of solar energy	10%
Reduction of reflection	85%
Sun transmission	10%
Rejected solar energy single glazing	85%
Rejected solar energy double glazing	90%
G-value	0.14
U-value single	5.7
U-value double	
Shade coefficient	0.18
Infrared rejection (760-2500 nm)	85%

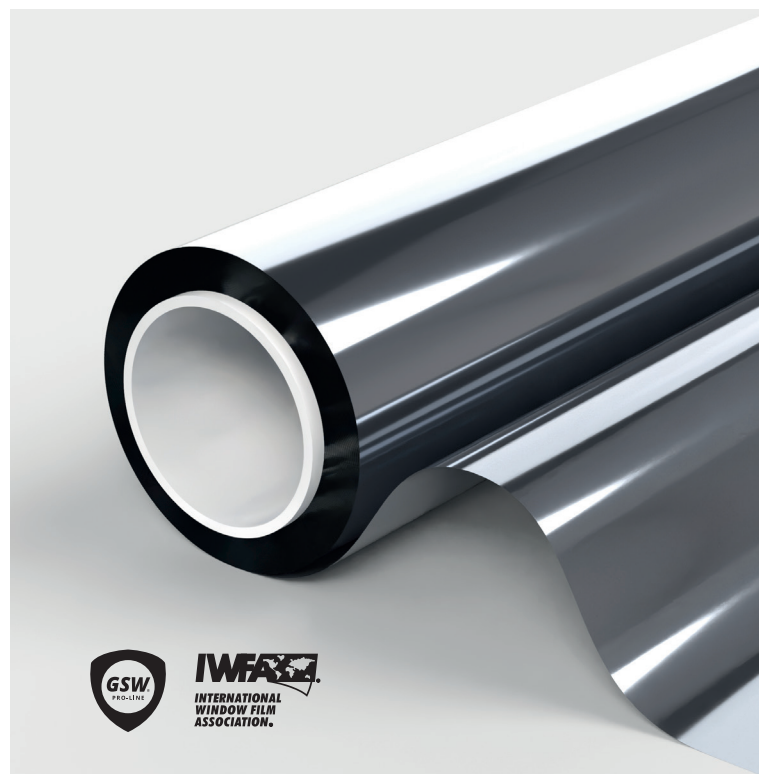

99%



UV

85%



16%

LTA

18%



AZ-EG

ABS

SOLAR

Warranty vertical* 10 years

Warranty horizontal* 7 years

Installation outside

Foil colour Silver

Foil colour inside

* Window film under cover strip or use tested Bloem® sealing products.

PROFESSIONAL WINDOWFILM
VISIT **GSWFILM.COM**

Contact sales +31 (0)299-323122 info@gswfilm.com



RS 20 Super Plus Extern

Sun protection privacy film External.

SKU: REZ1809

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	Yes
Stadip ext. clear double pane	Yes
Stadip int. clear double pane	Yes
Triple glazed	Yes
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	122, 152 and 183 cm
Length(s)	30 meters
Film thickness	60 µ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to +40 °C
Fire class	EN13501-1
Energy performance	EN 410
Manufacturer	Distributeur Global® Windowfilms

Installation

Install window film with water and Servfaces® Slip.
Absolutely do not use chemical agents!


Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with Servfaces® Fast Shine - 3 in ONE. Be careful not to use chemicals!

*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.

U-value

The lower the U-value, the better the thermal resistance of the window film, meaning less heat is lost to the outside.

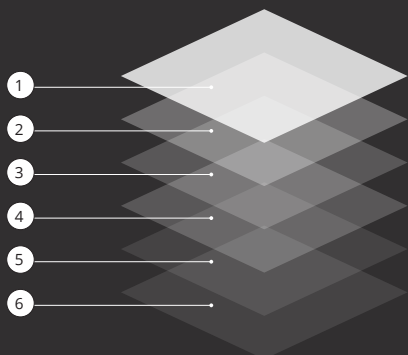

1. Hard scratch-resistant layer for long life and ease of maintenance when cleaning the windows.
2. Optically high-quality polyester, with metal particles against IR radiation.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

SOLAR

PROFESSIONAL WINDOWFILM
VISIT [GSWFILM.COM](https://www.gswfilm.com)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW

Glass Solution Windowfilm B.V. Schepnetstraat 3a, 1446 AL Purmerend +31 (0)299-323 122 info@gswfilm.com



FREE SAMPLE

V17/07/26