



# 2 Mil UV Blocker


Sun protection privacy film Internal

SKU: RU1570


**Global® 2 Mil UV Blocker Window Film**  
 Carefully applied to glass, UV rays from the Sun and Moon are absorbed extremely effectively (99% to 385% Nm). This film protects furniture, interior and objects in the interior from light, so that they fade and age less quickly.

**Features:**

- Blocks UV protection High.
- Delayed discoloration.
- Blocks UVA.
- Glass and your interior will have a longer lifespan.
- Transparent.
- Clear view on both sides.

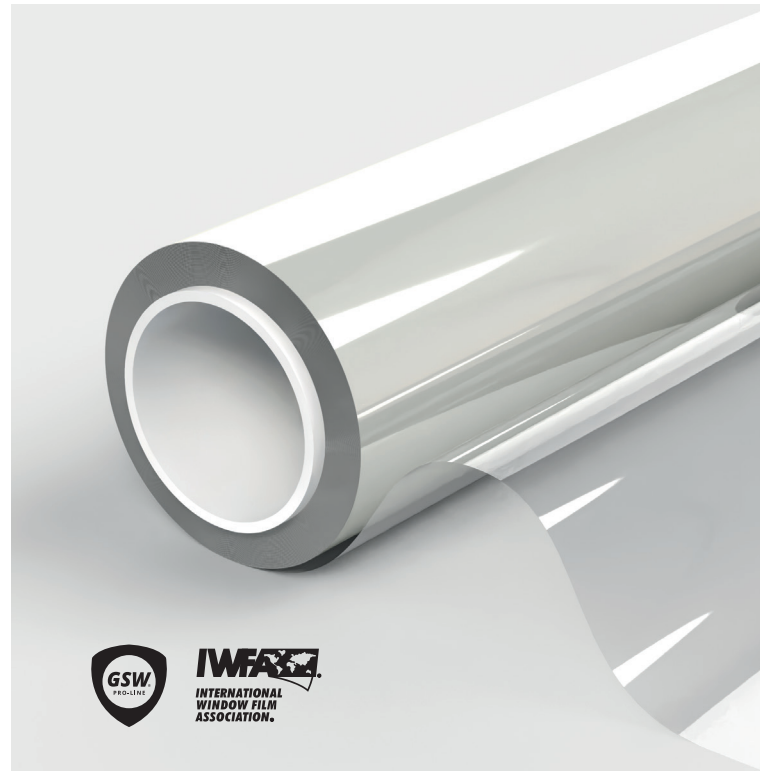

PRODUCT PERFORMANCE	
UV protection	99.5%
Light transmission	89%
Reflection of visible light outside	6%
Reflection of visible light inside	7%
Reflection of solar energy	6%
Absorption of solar energy	13%
Transmission of solar energy	81%
Reduction of reflection	2%
Sun transmission	85%
Rejected solar energy single glazing	15%
Rejected solar energy double glazing	24%
G-value	0.85
U-value single	
U-value double	
Shade coefficient	0.98

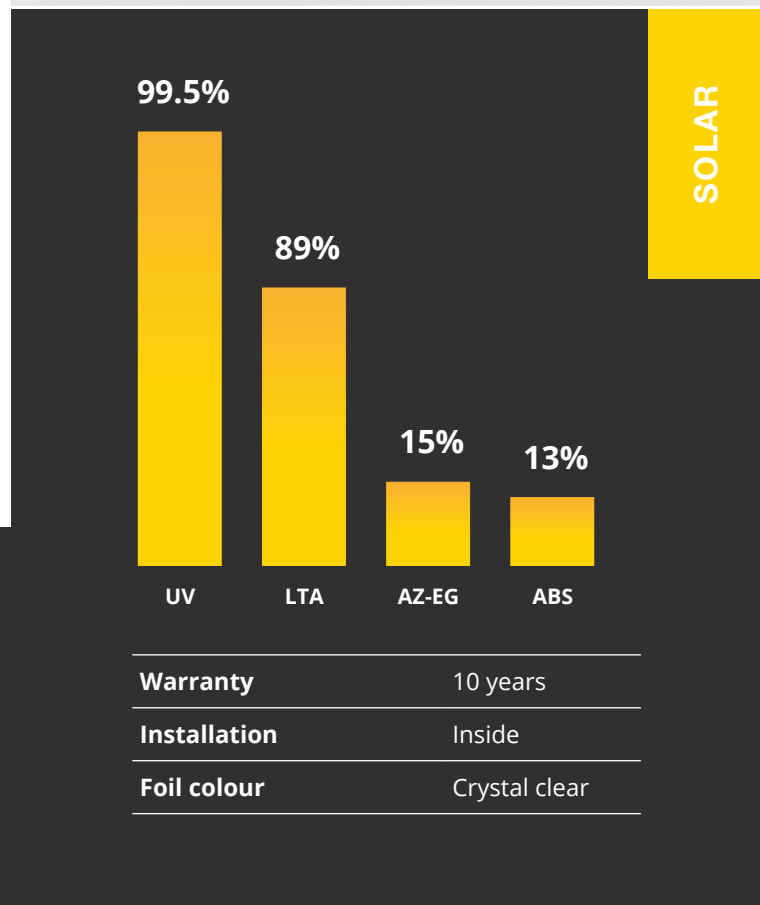

Warranty	10 years
Installation	Inside
Foil colour	Crystal clear

**PROFESSIONAL WINDOWFILM**  
 VISIT [GSWFILM.COM](http://GSWFILM.COM)

Contact sales +31 (0)299-323122 [info@gswfilm.com](mailto:info@gswfilm.com)

# 2 Mil UV Blocker

Sun protection privacy film Internal

SKU: RU1570

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	Yes
Stadip ext. clear double pane	Yes
Stadip int. clear double pane	Yes
Triple glazed	Yes
Acrylic 4 mm	Yes
Polycarbonate 4 mm	No

PRODUCT FEATURES	
Width(s)	152 and 183 cm
Length(s)	30 meters
Film thickness	50 μ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	Distributeur Global® Windowfilms

### Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!


### Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

\*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.

### U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

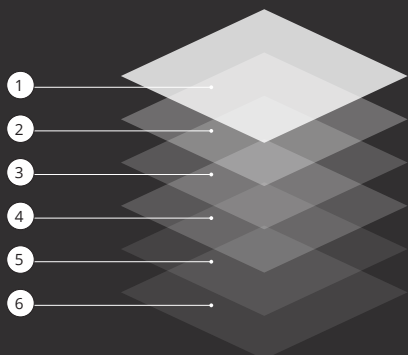

1. Hard scratch-resistant layer for long life and ease of maintenance when cleaning the windows.
2. Optical high quality polyester.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

**PROFESSIONAL WINDOWFILM**  
VISIT [GSWFILM.COM](http://GSWFILM.COM)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (\*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW

Glass Solution Windowfilm B.V. Schepnetstraat 3a, 1446 AL Purmerend +31 (0)299-323 122 info@gswfilm.com



FREE SAMPLE

SOLAR

V08/01/26