



# NR Quick Dry Plus 70

Car window film

SKU: RN0585

More than just a pretty face! Yes, Global® QDP may be the best looking car window film on the market today. But that's just the beginning of its appeal. This metal-free, color-stable window film is extremely durable.

## Features:

Excellent infrared blocking.


Extremely fast blow-dryable advice Plexus® Spray.

Metal-free heat protection system.

Dries quickly upon installation and delivery.


Blocks 99% UV.

Radio and GPS friendly.

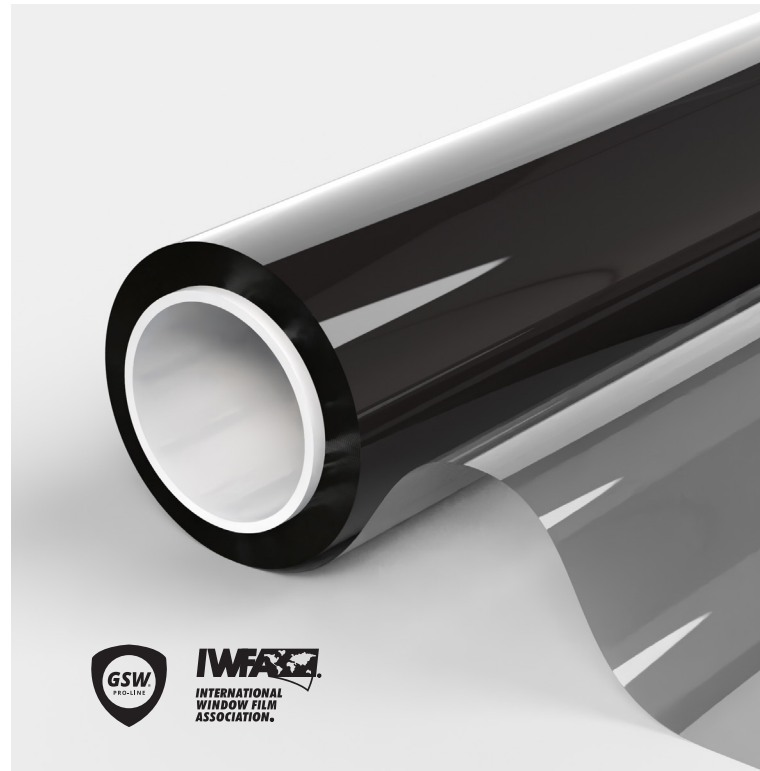

## PRODUCT PERFORMANCE

UV protection	99%
Light transmission	70%
Reflection of visible light outside	7%
Reflection of visible light inside	8%
Reflection of solar energy	4%
Absorption of solar energy	25%
Transmission of solar energy	78%
Reduction of reflection	27%
Sun transmission	78%
Rejected solar energy single glazing	22%
Rejected solar energy double glazing	-
Infrared rejection (760-2500 nm)	-

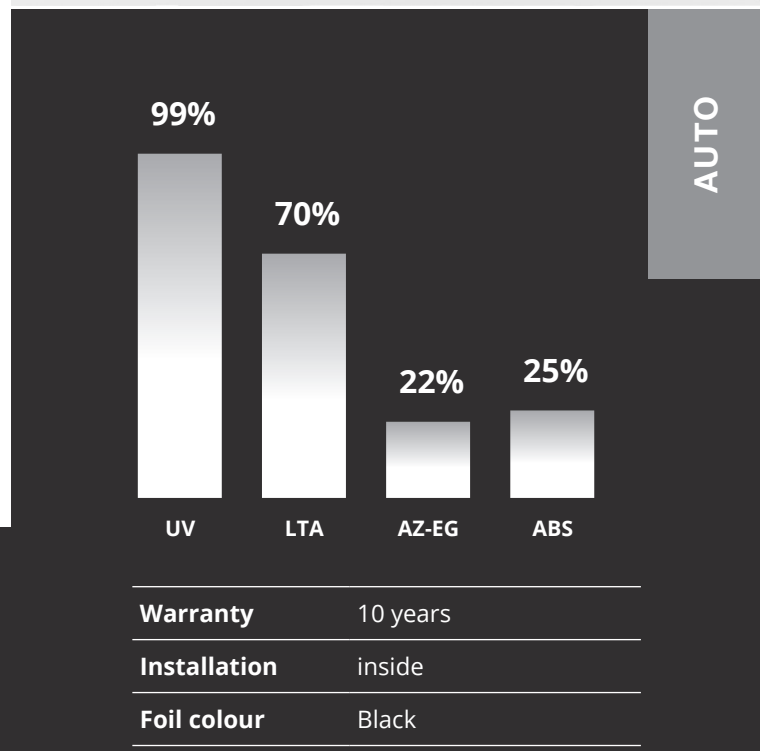

AUTO

**PROFESSIONAL WINDOWFILM**  
**VISIT [GSWFILM.COM](http://GSWFILM.COM)**

Contact sales +31 (0)299-323122 [info@gswfilm.com](mailto:info@gswfilm.com)

# NR Quick Dry Plus 70

Auto raamfolie

SKU: RN0585

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	NB!
Clear double pane	Yes
Tinted double pane	NB!
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	NB!
Stadip ext. clear double pane	NB!
Stadip int. clear double pane	NB!
Triple glazed	NB!
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

**\*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

## Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

PRODUCT FEATURES	
Width(s)	51, 76, 101 and 152 cm
Length(s)	30 meters
Film thickness	1.5
Material	Polyester
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	Distributor Global® Window Films

## Supershrink

Global® auto window films are made with Super Shrink substrates and patented anti-static technology for effortless dry shrink and faster, cleaner installations. Exterior PET protective layer from 270° degrees with digital Heatgun.

## Plotter friendly

Global® window films are an ideal choice for tinters who use a plotter to cut vehicle patterns. They cut easily thanks to the specially designed antistatic protective layer.

## Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!



1. Hard scratch-resistant layer for a long life and ease of maintenance when cleaning the windows.
2. Colored polyester without optical distortion.
3. Hybrid adhesive glue.
4. Protective film, disposable after installation.

AUTO

**PROFESSIONAL WINDOWFILM**  
VISIT [GSWFILM.COM](http://GSWFILM.COM)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (\*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW

Glass Solution Windowfilm B.V. Schepnetstraat 3a, 1446 AL Purmerend +31 (0)299-323 122 [info@gswfilm.com](mailto:info@gswfilm.com)



FREE SAMPLE