



QDP Ceramic 70


Car window film

SKU: RNC0505


The Ultimate Automotive Window Film Global® Nano-Ceramic has it all. Great looks, impressive performance and the protection of a lifetime warranty. This film incorporates ceramic technology to produce a metal-free, colour stable window film that is ideal for the discerning automotive enthusiast.

Features:

- Blocks infrared Extreme.**
- Extremely fast blow-dryable with Plexus® Spray.**
- Nano-Ceramic heat protection system.**
- Crystal clear and fine HD vision.**
- Blocks 99% UV.**
- Radio and GPS friendly.**

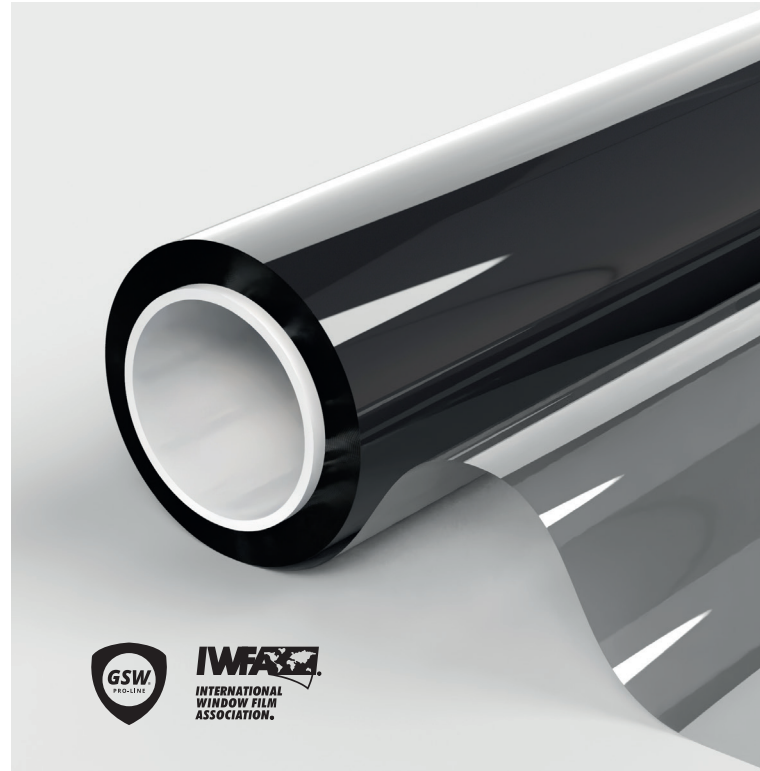

PRODUCT PERFORMANCE	
UV protection	99%
Light transmission	70%
Reflection of visible light outside	8%
Reflection of visible light inside	8%
Reflection of solar energy	9%
Absorption of solar energy	65%
Transmission of solar energy	26%
Reduction of reflection	31%
Sun transmission	53%
Rejected solar energy single glazing	47%
Rejected solar energy double glazing	-
Infrared rejection (760-2500 nm)	85%

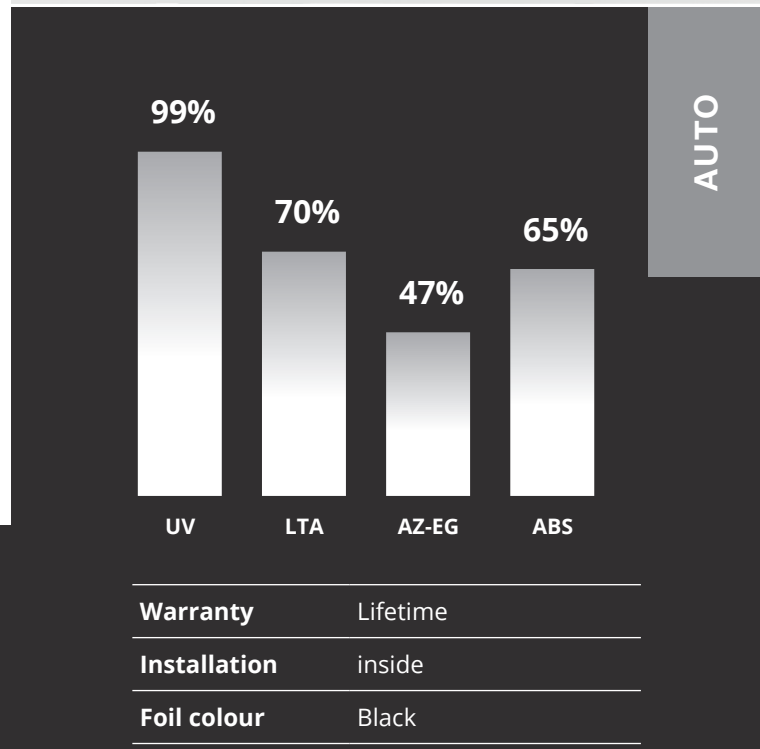

AUTO

**PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM**

Contact sales +31 (0)299-323122 info@gswfilm.com

QDP Ceramic 70

Auto raamfolie

SKU: RNC0505

GLASS TYPES	SUITABLE
Clear single pane	NB!
Tinted single pane	NB!
Reflective tinted single pane	no
Clear double pane	no
Tinted double pane	no
Reflective tinted double pane	no
Gas-filled double pane - Low E	no
Stadip ext. clear double pane	no
Stadip int. clear double pane	no
Triple glazed	no
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	51, 76, 101 and 152 cm
Length(s)	30 meters
Film thickness	2
Material	Polyester
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	Distributor Global® Window Films

***Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

Supershrink


Auto window films are made with Super Shrink substrates and patented anti-static technology for effortless dry shrink and faster, cleaner installations. Exterior PET protective layer from 270° degrees with digital Heatgun.

Plotter friendly

Automotive Window films are an ideal choice for tinters who use a plotter to cut vehicle patterns. They cut easily thanks to the specially designed antistatic protective layer.

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

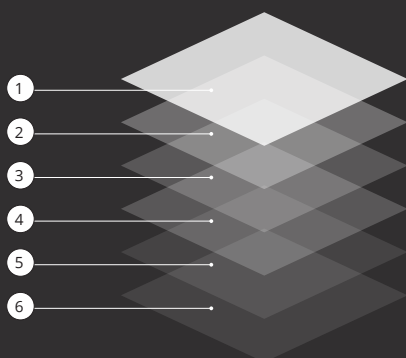

1. Hard scratch-resistant layer for a long life and ease of maintenance when cleaning the windows.
2. High quality optical polyester, tinted in the mass, with anti-heat nano-ceramic particles.
3. Self-adhesive hybride glue, polymerization with glass within 15 days.
4. Protective film, disposable after installation.

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW

Glass Solution Windowfilm B.V. Schepnetstraat 3a, 1446 AL Purmerend +31 (0)299-323 122 info@gswfilm.com



FREE SAMPLE

AUTO

V25/09/25