



CC005 Fuchsia

Colour raamfolie

SKU: RK1554

GSW® CC005 Crystal Clear Pink Window Film allows you to give glass a color and leave transparency completely intact. It is the perfect way to give interior glass such as partition walls, shower screens, glass system walls and the like a colorful appearance.

Features:

Turns your environment into a wink.

Creates a beautiful appearance.

Glass gets a longer lifespan.


Do not expose window film to the sunny side.

Fuchsia.



PRODUCT PERFORMANCE

| | |
|--------------------------------------|-----|
| UV protection | 99% |
| Light transmission | 48% |
| Reflection of visible light outside | 10% |
| Reflection of visible light inside | 10% |
| Reflection of solar energy | 10% |
| Absorption of solar energy | 37% |
| Transmission of solar energy | 53% |
| Reduction of reflection | 50% |
| Sun transmission | 83% |
| Rejected solar energy single glazing | 17% |
| Rejected solar energy double glazing | 19% |
| G-value | |
| U-value single | 5.7 |
| U-value double | |
| Shade coefficient | |

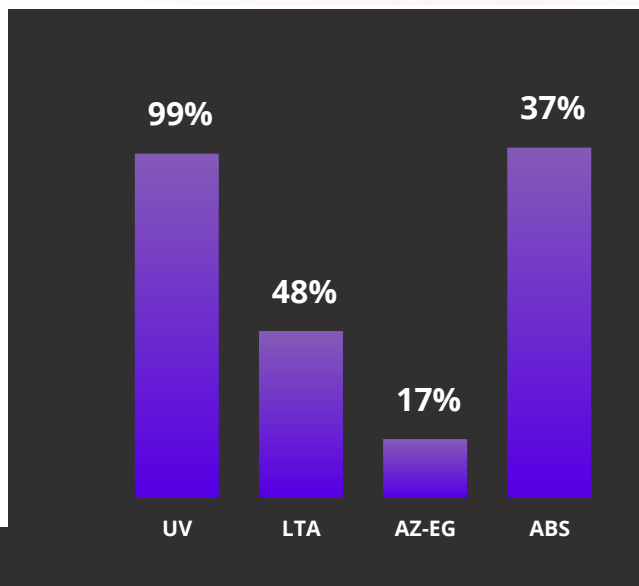

COLORS

| | |
|---------------------|-------------------------------------|
| Warranty | Warranty 3 years not on sunny side. |
| Installation | Inside |
| Foil colour | Fuchsia. |

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com

CC005 Fuchsia

Colour raamfolie

SKU: RK1554

| GLASS TYPES | SUITABLE |
|--------------------------------|----------|
| Clear single pane | Yes |
| Tinted single pane | Yes |
| Reflective tinted single pane | Yes |
| Clear double pane | Yes |
| Tinted double pane | Yes |
| Reflective tinted double pane | no |
| Gas-filled double pane - Low E | no |
| Stadip ext. clear double pane | no |
| Stadip int. clear double pane | no |
| Triple glazed | no |
| Acrylic 4 mm | Yes |
| Polycarbonate 4 mm | no |

| PRODUCT FEATURES | |
|---------------------|------------------|
| Width(s) | 152 cm |
| Length(s) | 30 meters |
| Film thickness | 40 μ |
| Material | PET |
| Storage period | 3 years |
| Storage temperature | -5 °C to '+40 °C |
| Fire class | EN13501-1 |
| Manufacturer | |

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

***Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.



1. Hard scratch-resistant mat layer for long life and ease of maintenance when cleaning the windows.
2. Colored Polyester without optical distortion.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

PROFESSIONAL WINDOWFILM
VISIT [GSWFILM.COM](https://www.gswfilm.com)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE