



# CC011 Orange

Colour raamfolie

SKU: RK1560

GSW® CC011 Crystal Clear Orange Window Film allows you to give glass a color and leave transparency completely intact. It is the perfect way to give interior glass such as partition walls, shower screens, glass system walls and the like a colorful appearance.

## Features:


**Turns your environment into a wink.**

**Creates a beautiful appearance.**


**Glass gets a longer lifespan.**

**Do not expose window film to the sunny side.**

**Orange.**

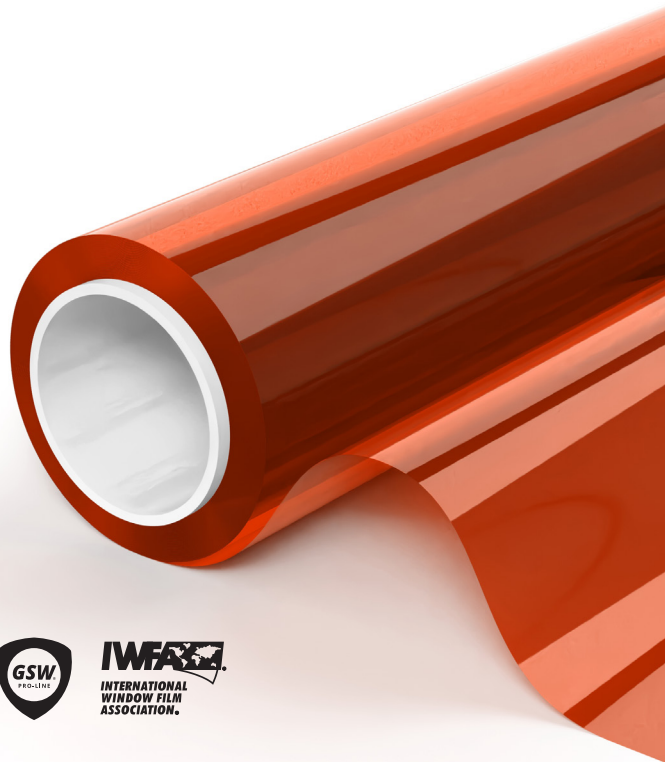

PRODUCT PERFORMANCE	
UV protection	99%
Light transmission	20%
Reflection of visible light outside	7%
Reflection of visible light inside	7%
Reflection of solar energy	9%
Absorption of solar energy	17%
Transmission of solar energy	74%
Reduction of reflection	18%
Sun transmission	82%
Rejected solar energy single glazing	16%
Rejected solar energy double glazing	18%
G-value	
U-value single	5.7
U-value double	
Shade coefficient	

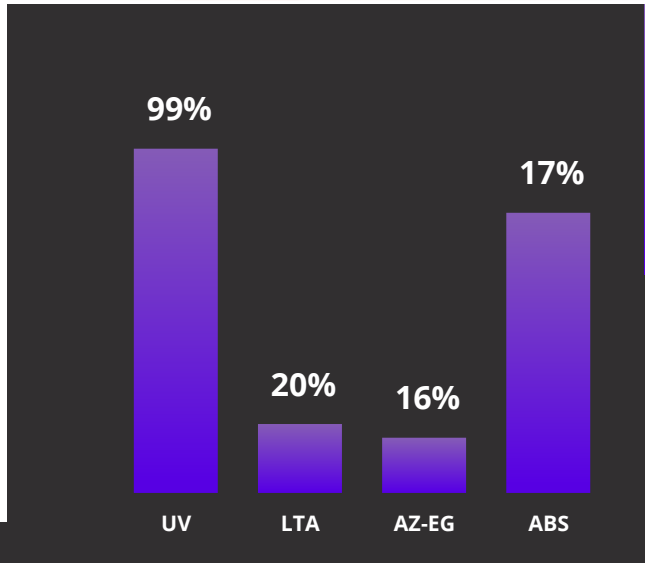

COLORS

<b>Warranty</b>	Warranty 3 years not on sunny side.
<b>Installation</b>	Inside
<b>Foil colour</b>	Orange.

**PROFESSIONAL WINDOWFILM**  
VISIT [GSWFILM.COM](http://GSWFILM.COM)

Contact sales +31 (0)299-323122 [info@gswfilm.com](mailto:info@gswfilm.com)

# CC011 Orange

Colour raamfolie

SKU: RK1560

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	no
Gas-filled double pane - Low E	no
Stadip ext. clear double pane	no
Stadip int. clear double pane	no
Triple glazed	no
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	30 meters
Film thickness	40 μ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	

**\*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

### U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

### Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

### Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!



1. Hard scratch-resistant mat layer for long life and ease of maintenance when cleaning the windows.
2. Colored Polyester without optical distortion.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

**PROFESSIONAL WINDOWFILM**  
VISIT [GSWFILM.COM](http://GSWFILM.COM)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (\*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE