



# CC013 Spring Green


Colour raamfolie

SKU: RK1562

GSW® CC013 Crystal Clear Green Window Film allows you to give glass a color and leave transparency completely intact. It is the perfect way to give interior glass such as partition walls, shower screens, glass system walls and the like a colorful appearance.


### Features:

- Turns your environment into a wink.
  - Creates a beautiful appearance.
  - Glass gets a longer lifespan.
  - Do not expose window film to the sunny side.
- Spring Green.

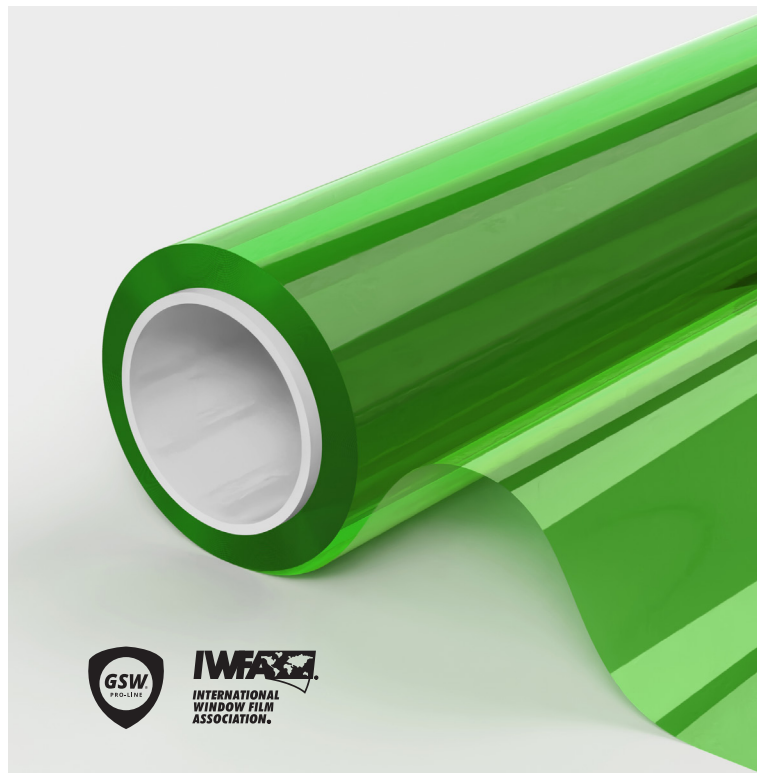

### PRODUCT PERFORMANCE

UV protection	99%
Light transmission	37%
Reflection of visible light outside	8%
Reflection of visible light inside	8%
Reflection of solar energy	9%
Absorption of solar energy	43%
Transmission of solar energy	48%
Reduction of reflection	64%
Sun transmission	71%
Rejected solar energy single glazing	29%
Rejected solar energy double glazing	32%
G-value	
U-value single	5.7
U-value double	
Shade coefficient	

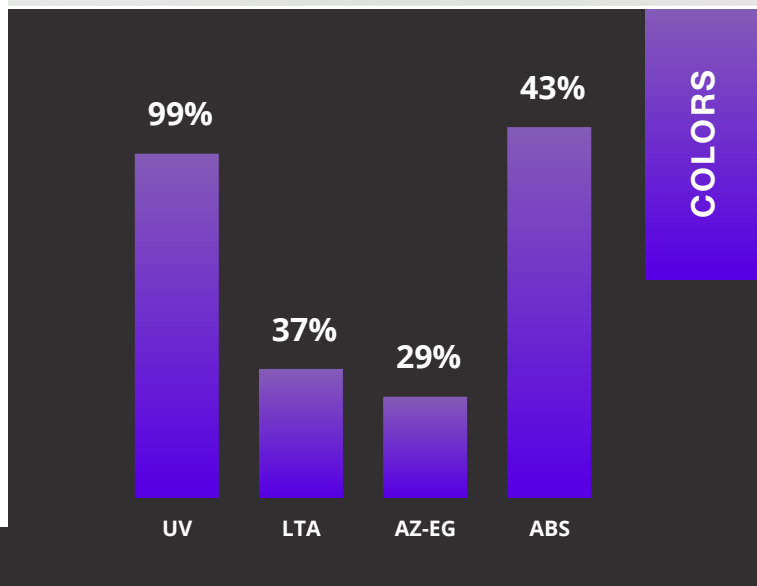

COLORS

Warranty	Warranty 3 years not on sunny side.
Installation	Inside
Foil colour	Spring Green.

PROFESSIONAL WINDOWFILM  
VISIT [GSWFILM.COM](http://GSWFILM.COM)

Contact sales +31 (0)299-323122 [info@gswfilm.com](mailto:info@gswfilm.com)

# CC013 Spring Green

Colour raamfolie

SKU: RK1562

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	no
Gas-filled double pane - Low E	no
Stadip ext. clear double pane	no
Stadip int. clear double pane	no
Triple glazed	no
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	30 meters
Film thickness	40 µ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	

### Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

### Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

**\*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

### U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.



1. Hard scratch-resistant mat layer for long life and ease of maintenance when cleaning the windows.
2. Colored Polyester without optical distortion.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

**PROFESSIONAL WINDOWFILM**  
VISIT [GSWFILM.COM](http://GSWFILM.COM)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (\*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE