



CC023 Dichroic Red

Colour raamfolie

SKU: RK1572

GSW® CC023 Chameleon effect Red transforms the window film by making optimal use of daylight and brings your windows and glass surfaces to life. It is the perfect way to give interior glass such as partition walls, shower screens, glass system walls, glass facades and the like a colorful appearance.

Features:


Turns your environment into a wink.

Creates a beautiful appearance.

Glass gets a longer lifespan.

Color changes with viewing angle.

Red/Gold/Cyan/Blue and Magenta.

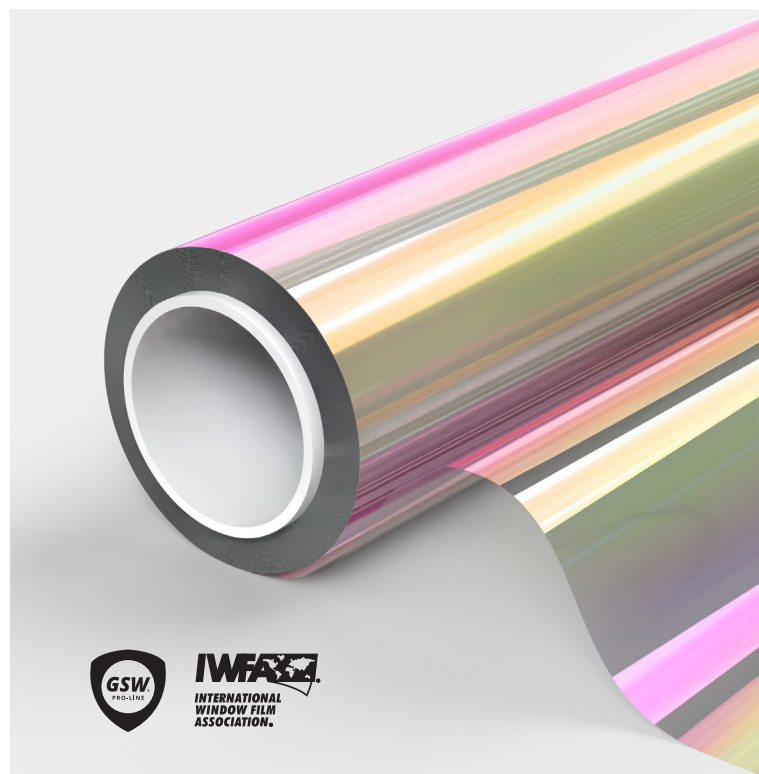

COLORS

PRODUCT PERFORMANCE	
UV protection	99%
Light transmission	19%
Reflection of visible light outside	10%
Reflection of visible light inside	10%
Reflection of solar energy	
Absorption of solar energy	
Transmission of solar energy	
Reduction of reflection	28%
Sun transmission	61%
Rejected solar energy single glazing	41%
Rejected solar energy double glazing	43%
G-value	
U-value single	5.7
U-value double	
Shade coefficient	

99%



UV

19%



LTA

41%



AZ-EG

ABS

Warranty

Warranty 3 years.

Installation

Inside

Foil colour

Red/Gold/Cyan/Blue and Magenta.

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com

CC023 Dichroic Red

Colour raamfolie

SKU: RK1572

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	no
Gas-filled double pane - Low E	no
Stadip ext. clear double pane	no
Stadip int. clear double pane	no
Triple glazed	no
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

***Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.


PRODUCT FEATURES	
Width(s)	138 cm
Length(s)	30 meters
Film thickness	55 µ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

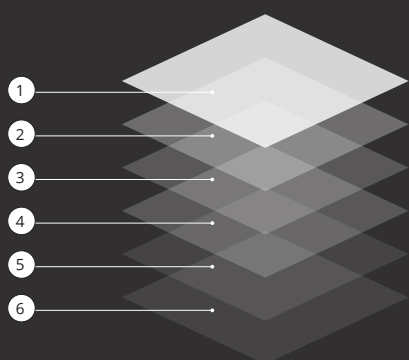

1. Hard scratch-resistant mat layer for long life and ease of maintenance when cleaning the windows.
2. Colored Polyester without optical distortion.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

PROFESSIONAL WINDOWFILM
VISIT [GSWFILM.COM](https://www.gswfilm.com)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW

Glass Solution Windowfilm B.V. Schepnetstraat 3a, 1446 AL Purmerend +31 (0)299-323 122 info@gswfilm.com



FREE SAMPLE