



# Etched glass ST771

Privacy

SKU: RA1530

GSW® Etched glass ST 771 frosted window film offers total privacy, inside and out. The solution for privacy protection and allows diffuse light to pass through.

## Features:

**Ideal against prying eyes during the day and in the evening.**

**Standard colour in the construction world.**

**Creates an attractive appearance on the facade.**


**Glass gets a longer lifespan.**

**Print & Plotter friendly.**

**Etched Mat Silver look.**



PRODUCT PERFORMANCE	
UV protection	99%
Light transmission	60%
Reflection of visible light outside	18%
Reflection of visible light inside	18%
Reflection of solar energy	18%
Absorption of solar energy	15%
Transmission of solar energy	67%
Reduction of reflection	40%
Sun transmission	71%
Rejected solar energy single glazing	28%
Rejected solar energy double glazing	29%
G-value	0.71
U-value single	5.6
U-value double	
Shade coefficient	0.71

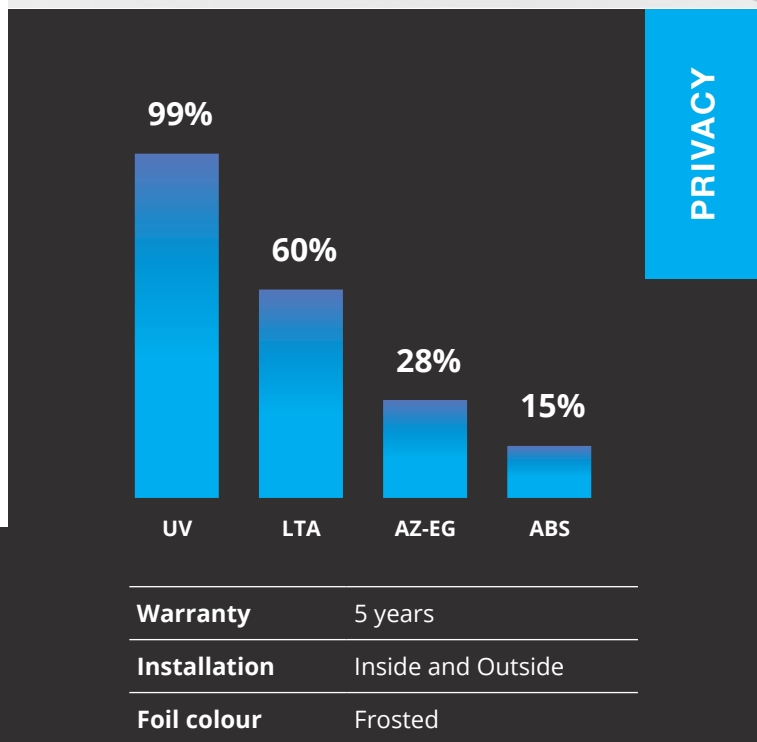

**PROFESSIONAL WINDOWFILM**  
**VISIT [GSWFILM.COM](http://GSWFILM.COM)**

Contact sales +31 (0)299-323122 [info@gswfilm.com](mailto:info@gswfilm.com)

# Etched glass ST771

Privacy

SKU: RA1530

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	Yes
Stadip ext. clear double pane	Yes
Stadip int. clear double pane	Yes
Triple glazed	Yes
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	152 and 122 cm
Length(s)	50 meters
Film thickness	60 μ
Material	PVC
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	

**\*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

### U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

### Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

### Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!



1. Cast Polymeric PVC.
2. Semi permanent adhesive.
3. Paper that can be digitally cut and thrown away after installation.

**PROFESSIONAL WINDOWFILM**  
VISIT [GSWFILM.COM](https://www.gswfilm.com)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (\*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE