



Matte White


Privacy

SKU: RA1823

GSW® Matte White frosted window film offers total privacy, from the inside and outside. The window film has a white frosted glass effect and the natural light is largely filtered, creating a subtle ambient light.


Features:

- Ideal against prying eyes during the day and in the evening.**
- Standard colour in the construction world.**
- Creates an attractive appearance on the facade.**
- Glass gets a longer lifespan.**
- Allows diffuse light to pass through.**
- Matte white look.**

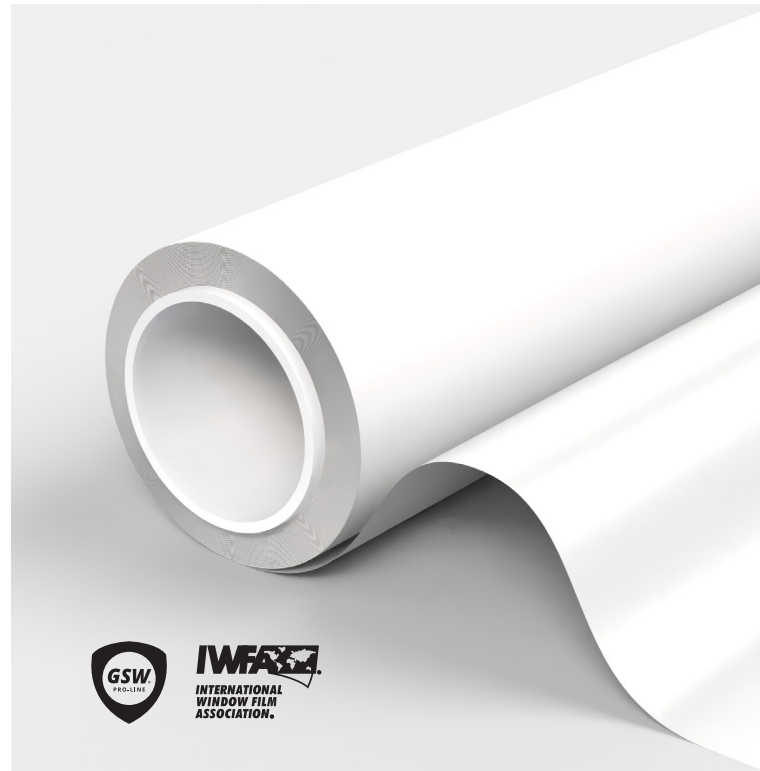

PRODUCT PERFORMANCE

| | |
|--------------------------------------|------|
| UV protection | 99% |
| Light transmission | 69% |
| Reflection of visible light outside | 26% |
| Reflection of visible light inside | 18% |
| Reflection of solar energy | 18% |
| Absorption of solar energy | 19% |
| Transmission of solar energy | 63% |
| Reduction of reflection | 27% |
| Sun transmission | 71% |
| Rejected solar energy single glazing | 29% |
| Rejected solar energy double glazing | 29% |
| G-value | 0.71 |
| U-value single | 5.6 |
| U-value double | |
| Shade coefficient | 0.8 |

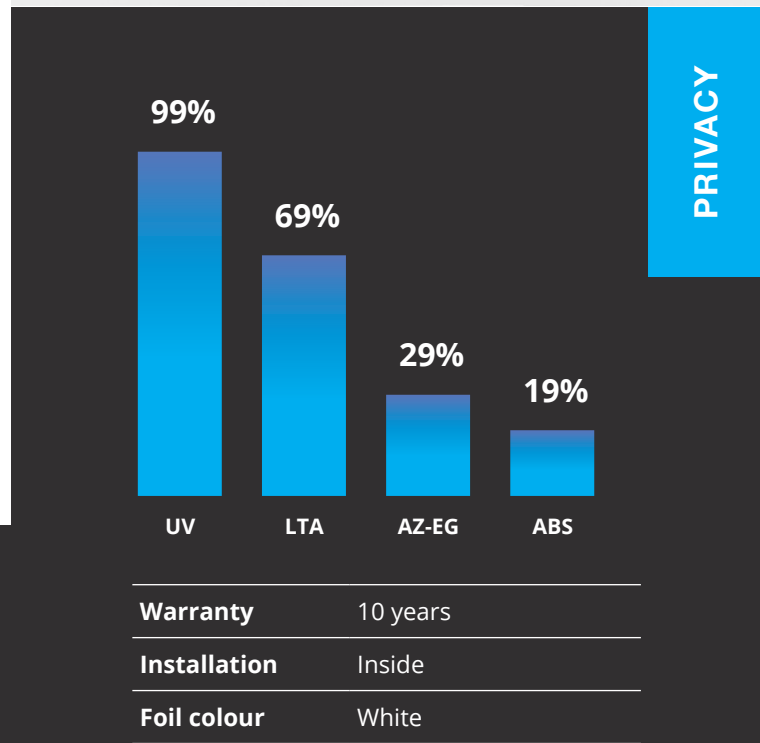

PRIVACY

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com

Matte White

Privacy

SKU: RA1823

| GLASS TYPES | SUITABLE |
|--------------------------------|----------|
| Clear single pane | Yes |
| Tinted single pane | Yes |
| Reflective tinted single pane | Yes |
| Clear double pane | Yes |
| Tinted double pane | Yes |
| Reflective tinted double pane | Yes |
| Gas-filled double pane - Low E | Yes |
| Stadip ext. clear double pane | Yes |
| Stadip int. clear double pane | Yes |
| Triple glazed | Yes |
| Acrylic 4 mm | Yes |
| Polycarbonate 4 mm | no |

| PRODUCT FEATURES | |
|---------------------|-------------------------|
| Width(s) | 183, 152, 122 and 91 cm |
| Length(s) | 30 meters |
| Film thickness | 60 µ |
| Material | PET |
| Storage period | 3 years |
| Storage temperature | -5 °C to '+40 °C |
| Fire class | EN13501-1 |
| Manufacturer | |

***Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

U-value


The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

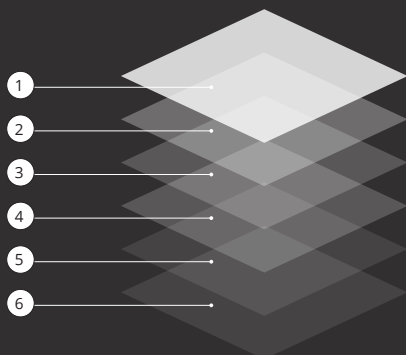

1. Hard scratch-resistant mat layer for long life and ease of maintenance when cleaning the windows.
2. Optically high quality Polyester.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

PROFESSIONAL WINDOWFILM
VISIT [GSWFILM.COM](https://www.gswfilm.com)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE