



# Safety 4 Mil Clear External

Safety film

SKU: RV1572

GSW® Safety 4 Mil Clear External crystal clear film provides reinforcement of the substrate against fall-through, prevents injury and splintering of glass in food according to European standards and guidelines

**Features:**

**EN 12600 2B2**


**Injury protection.**

**Extra safety for vertical and horizontal mounting.**


**Vandalism.**

**Glass will have a longer lifespan.**

**Completely transparent.**

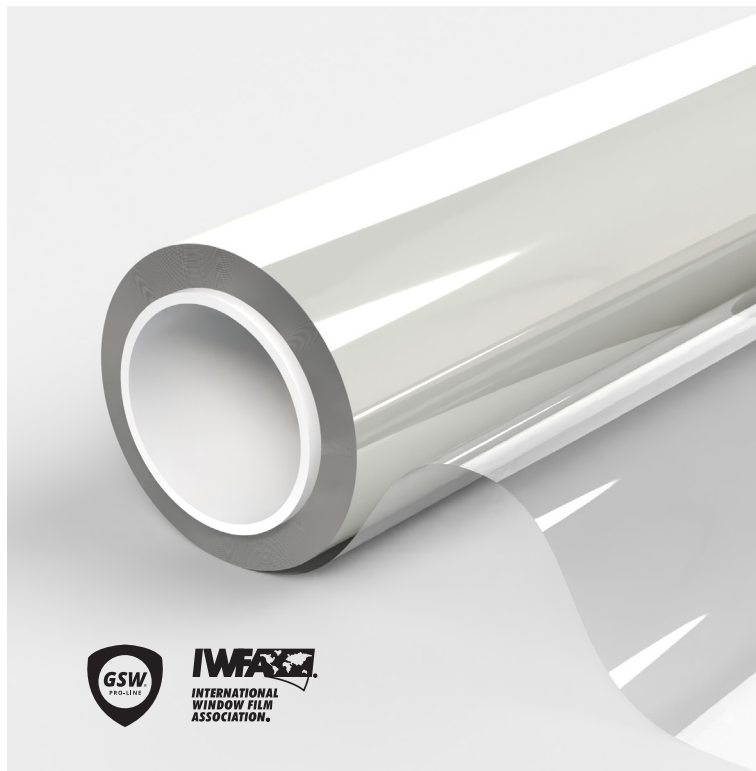

PRODUCT PERFORMANCE	
UV protection	99%
Light transmission	85%
Reflection of visible light outside	11%
Reflection of visible light inside	11%
Reflection of solar energy	9%
Absorption of solar energy	14%
Transmission of solar energy	77%
Reduction of reflection	14%
Sun transmission	81%
Rejected solar energy single glazing	19%
Rejected solar energy double glazing	19%
G-value	0.83
U-value single	5.7
U-value double	
Shade coefficient	0.9

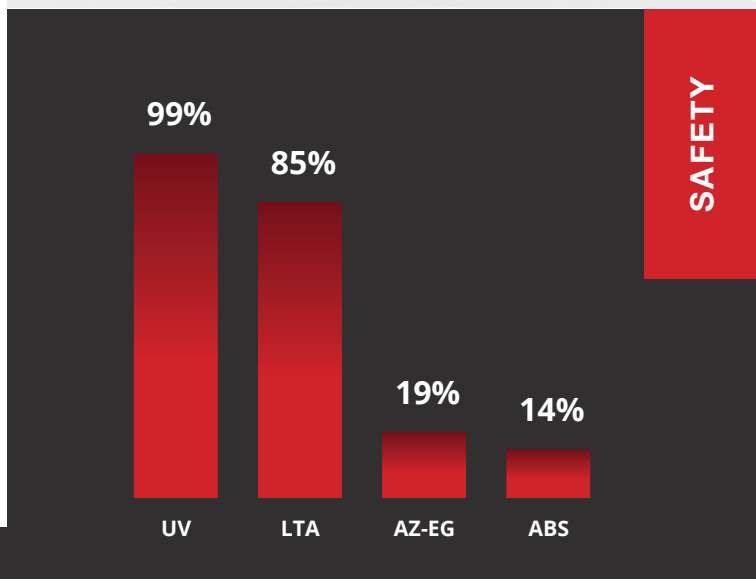

<b>Warranty vertical</b>	5 Years
<b>Warranty horizontal</b>	3 Years
<b>Installation</b>	Outside
<b>Foil colour</b>	Transparent
<b>Fire class</b>	EN13501-1

**PROFESSIONAL WINDOWFILM**  
**VISIT [GSWFILM.COM](http://GSWFILM.COM)**

Contact sales +31 (0)299-323122 [info@gswfilm.com](mailto:info@gswfilm.com)

# Safety 4 Mil Clear External

Safety film

SKU: RV1572

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	Yes
Stadip ext. clear double pane	Yes
Stadip int. clear double pane	Yes
Triple glazed	Yes
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	183, 152 and 122 cm
Length(s)	30 meters
Film thickness	125 µ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to +40 °C
Fire class	EN13501-1
Manufacturer	

**\*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

### U-value


The lower the U-value, the better the thermal resistance of the window film, meaning less heat is lost to the outside.

### Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

### Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

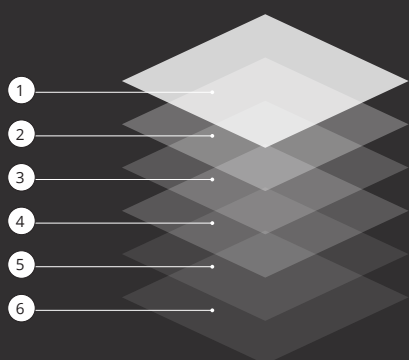

1. Hard scratch-resistant layer for long life and ease of maintenance when cleaning the windows.
2. Optically high quality Polyester.
3. Reinforced self-adhesive glue for higher elasticity of the film upon impact, polymerization with glass within 30 days.
4. Protective film, disposable after installation.

**PROFESSIONAL WINDOWFILM**  
VISIT [GSWFILM.COM](http://GSWFILM.COM)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (\*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW

Glass Solution Windowfilm B.V. Schepnetstraat 3a, 1446 AL Purmerend +31 (0)299-323 122 [info@gswfilm.com](mailto:info@gswfilm.com)



FREE SAMPLE