



Safety 4 Mil / Matte White

Safety film

SKU: RC1574

GSW® Safety 4 Mil / Matte White frosted combi film provides privacy, strengthens the substrate, prevents injuries and splintering of glass in food according to European standards and guidelines.

Features:

EN 12600 2B2

Injury Protection and Privacy.

Anti-splinter film for the food industry.

Allows diffuse light to pass through.


Glass will have a longer lifespan.

White.



PRODUCT PERFORMANCE

UV protection	99%
Light transmission	71%
Reflection of visible light outside	26%
Reflection of visible light inside	26%
Reflection of solar energy	23%
Absorption of solar energy	6%
Transmission of solar energy	71%
Reduction of reflection	22%
Sun transmission	73%
Rejected solar energy single glazing	27%
Rejected solar energy double glazing	28%
G-value	0.71
U-value single	5.6
U-value double	
Shade coefficient	0.8

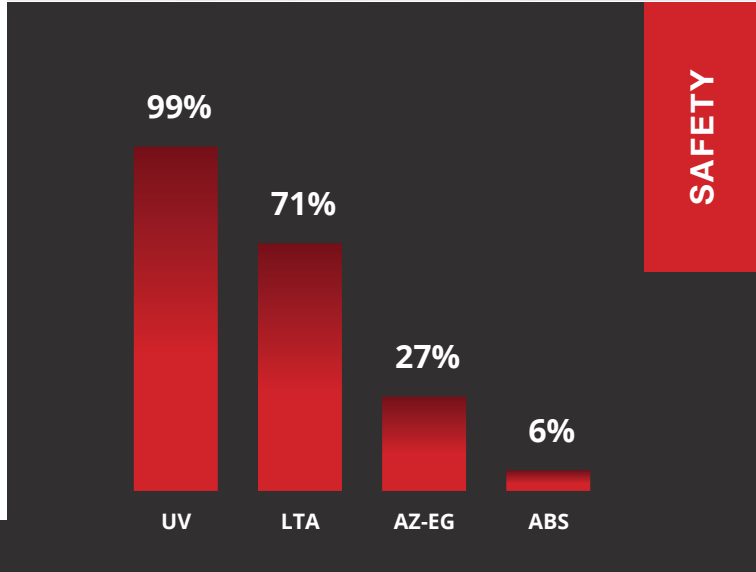

Warranty vertical	10 years
Warranty horizontal	10 years
Installation	Inside
Foil colour	White
Fire class	EN13501-1

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com

Safety 4 Mil / Matte White

Safety film

SKU: RC1574

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	Yes
Stadip ext. clear double pane	Yes
Stadip int. clear double pane	Yes
Triple glazed	NB!
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	30 meters
Film thickness	150 µ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to +40 °C
Fire class	EN13501-1
Manufacturer	

***Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

U-value

The lower the U-value, the better the thermal resistance of the window film, meaning less heat is lost to the outside.

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!



1. Hard scratch-resistant layer for long life and ease of maintenance when cleaning the windows.
2. Optically high-quality Polyester 100 µ.
3. Adhesive glue.
4. Matte polyester with sanded surface.
5. Reinforced self-adhesive glue for higher elasticity of the film upon impact, polymerization with glass within 30 days.
6. Protective film, disposable after installation.

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE