



Roofshield White Extern

Sun protection privacy film External.

SKU: REZ1518

GSW® Roofshield White External self-adhesive reflective window film is specially designed to protect against the harmful effects of sunlight and solar heat. Reflection is reduced and suitable for Polycarbonate channel plates.

Features:

- Blocks infrared High.
- Creates a beautiful appearance on the facade.
- Surface gets a longer lifespan.
- White glass look.
- Solar TPU.
- The latest technology.



SOLAR

PRODUCT PERFORMANCE	
UV protection	99%
Light transmission	14%
Reflection of visible light outside	72%
Reflection of visible light inside	44%
Reflection of solar energy	59%
Absorption of solar energy	25%
Transmission of solar energy	16%
Reduction of reflection	88%
Sun transmission	20%
Rejected solar energy single glazing	80%
Rejected solar energy double glazing	80%
G-value	0.18
U-value single	0.22
U-value double	
Shade coefficient	0.2
Infrared rejection (760-2500 nm)	

99%



UV

14%



LTA

80%



AZ-EG

25%



ABS

Warranty vertical* 5 years

Warranty horizontal* 5 years

Installation outside

Foil colour White

Foil colour inside

*

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com



Roofshield White Extern

Sun protection privacy film External.

SKU: REZ1518

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	Yes
Stadip ext. clear double pane	Yes
Stadip int. clear double pane	Yes
Triple glazed	no
Acrylic 4 mm	Yes
Polycarbonate 4 mm	Yes

*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.

U-value

The lower the U-value, the better the thermal resistance of the window film, meaning less heat is lost to the outside.


PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	15 meters
Film thickness	180 µ
Material	TPU
Storage period	1 years
Storage temperature	-5 °C to +40 °C
Fire class	EN13501-1
Energy performance	EN 410
Manufacturer	

Installation

Install window film with water and Servfaces® Slip. Absolutely do not use chemical agents!

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with Servfaces® Fast Shine - 3 in ONE. Be careful not to use chemicals!

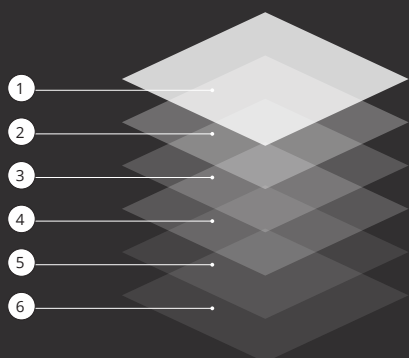

1. Capsheet.
2. Selfhealing Hydrophobic Coating.
3. TPU Color.
4. Pressure Adhesive.
5. Matte Release liner

PROFESSIONAL WINDOWFILM
VISIT [GSWFILM.COM](https://www.gswfilm.com)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW

Glass Solution Windowfilm B.V. Schepnetstraat 3a, 1446 AL Purmerend +31 (0)299-323 122 info@gswfilm.com



FREE SAMPLE

SOLAR

V17/07/26