



CC025 Blue Haze 75


Car window film

SKU: RK1574

GSW® Blue Haze 75 is a blueish sun protection window film gives beautiful colors on the outside and acts as a chameleon on your vehicle by natural light all year round. This film contains night and bad weather visibility technology.


Features:

- Normally blocks infrared.
- Good blow-dryable advice Plexus® Spray.
- Multi-layer metal system.
- Crystal clear and fine HD vision.
- Blocks 99% UV.
- Radio and GPS friendly.

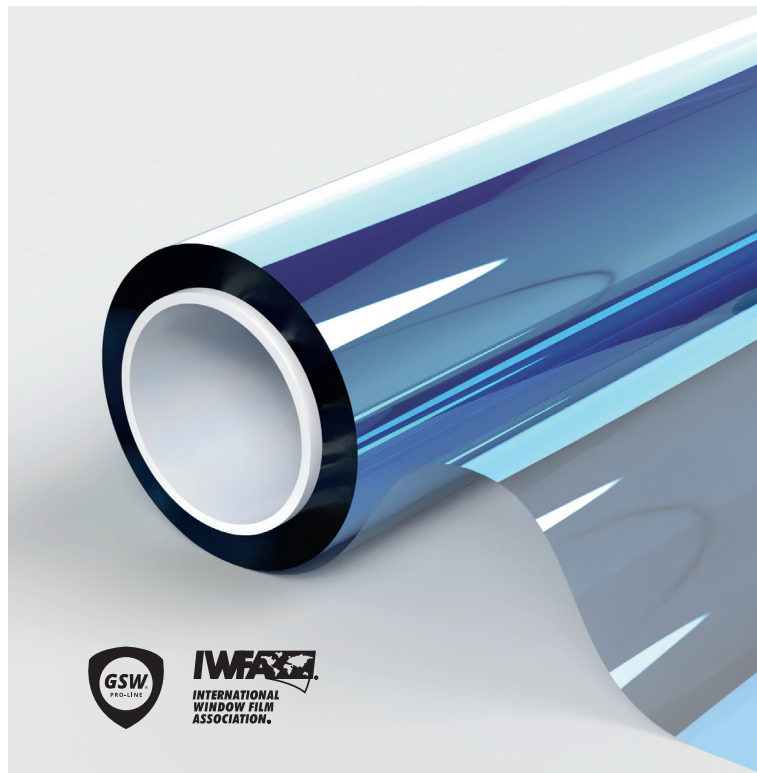

PRODUCT PERFORMANCE

UV protection	99%
Light transmission	78%
Reflection of visible light outside	-
Reflection of visible light inside	-
Reflection of solar energy	-
Absorption of solar energy	-
Transmission of solar energy	-
Reduction of reflection	-
Sun transmission	62%
Rejected solar energy single glazing	38%
Rejected solar energy double glazing	-
Infrared rejection (760-2500 nm)	89%

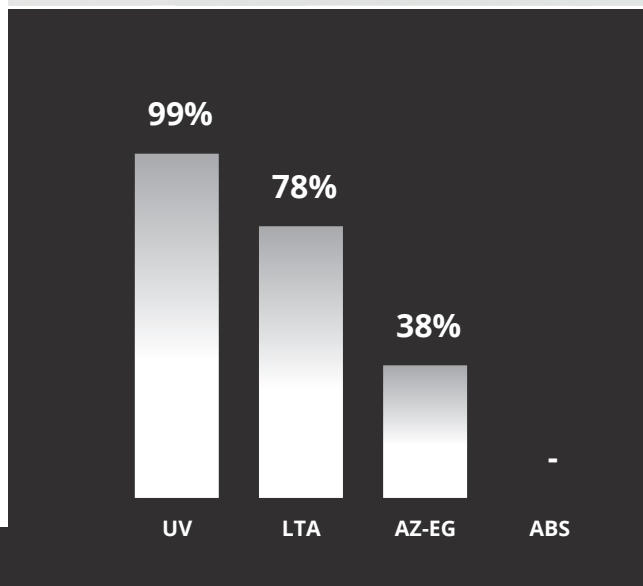

AUTO

Warranty	8 years
Installation	inside
Foil colour	Blue

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com

CC025 Blue Haze 75

Auto raamfolie

SKU: RK1574

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	NB!
Clear double pane	Yes
Tinted double pane	no
Reflective tinted double pane	no
Gas-filled double pane - Low E	no
Stadip ext. clear double pane	no
Stadip int. clear double pane	no
Triple glazed	no
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	30 meters
Film thickness	2
Material	Polyester
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	

***Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

Supershrink

Auto window films are made with Super Shrink substrates and patented anti-static technology for effortless dry shrink and faster, cleaner installations. Exterior PET protective layer from 270° degrees with digital Heatgun.

Plotter friendly

Automotive Window films are an ideal choice for tinters who use a plotter to cut vehicle patterns. They cut easily thanks to the specially designed antistatic protective layer.

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!



1. Hard scratch-resistant layer for a long life and ease of maintenance when cleaning the windows.
2. Colored polyester without optical distortion, with metal particles against IR radiation.
3. Self-adhesive hybrid glue, polymerization with glass within 15 days.
4. Protective film, disposable after installation.

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE