



# Roofshield Silver

Sun protection privacy film Internal

SKU: RZ1500


**GSW® Roofshield Silver self-adhesive reflective window film is specially designed to protect against the damaging effects of sunlight and solar heat is blocked, glare is reduced and discoloration of polycarbonate and other synthetic materials is prevented.**

**Features:**

- Blocks infrared High.
- Creates an attractive appearance on the facade.
- Ideal against prying eyes during the day.
- Polycarbonate has a longer lifespan.
- Matte diffuse silver look.
- Minimal visibility from inside to outside.



PRODUCT PERFORMANCE	
UV protection	99%
Light transmission	10%
Reflection of visible light outside	38%
Reflection of visible light inside	25%
Reflection of solar energy	42%
Absorption of solar energy	44%
Transmission of solar energy	14%
Reduction of reflection	88%
Sun transmission	22%
Rejected solar energy single glazing	75%
Rejected solar energy double glazing	78%
G-value	0.22
U-value single	
U-value double	
Shade coefficient	0.2

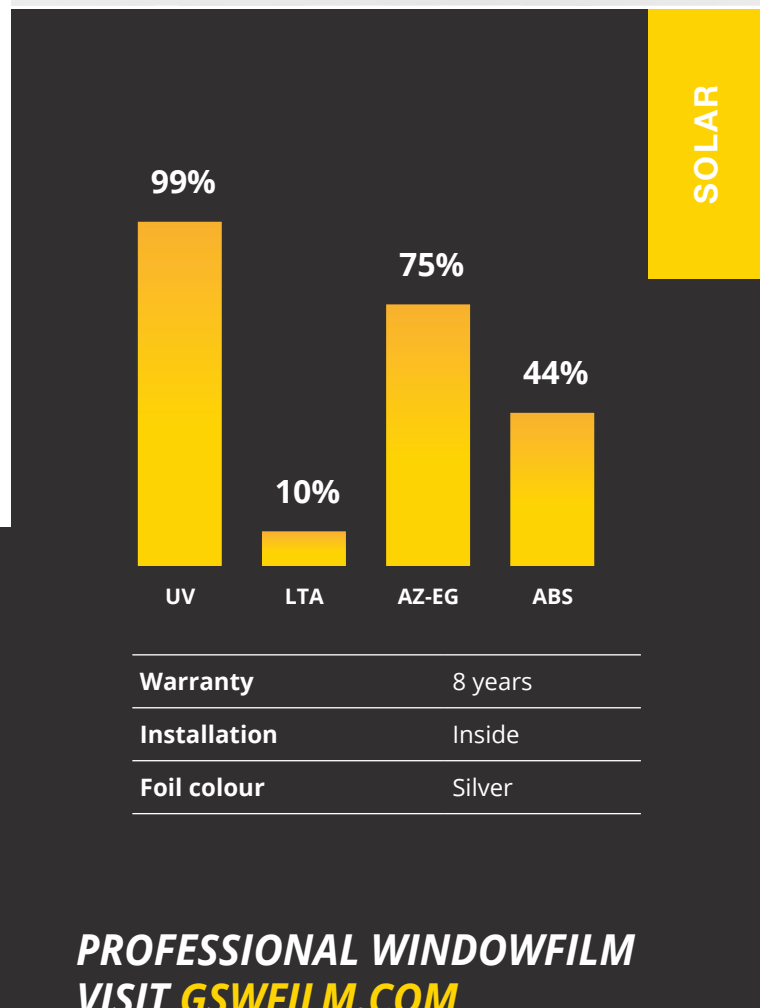

Warranty	8 years
Installation	Inside
Foil colour	Silver

**PROFESSIONAL WINDOWFILM**  
**VISIT [GSWFILM.COM](http://GSWFILM.COM)**

Contact sales +31 (0)299-323122 [info@gswfilm.com](mailto:info@gswfilm.com)

# Roofshield Silver

Sun protection privacy film Internal

SKU: RZ1500

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	NB !
Reflective tinted single pane	Yes
Clear double pane	NB !
Tinted double pane	No
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	No
Stadip ext. clear double pane	No
Stadip int. clear double pane	No
Triple glazed	No
Acrylic 4 mm	Yes
Polycarbonate 4 mm	Yes

PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	50 meters
Film thickness	60 μ
Material	PVC
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	

\*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.

### U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

### Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

### Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!



1. PVC with metal particles against IR radiation.
2. Semi-permanent adhesive that allows the surface to be degassed.
3. Protective film, disposable after installation.

**PROFESSIONAL WINDOWFILM**  
VISIT **GSWFILM.COM**

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (\*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



**FREE SAMPLE**