



Rear Projection Black

Special

SKU: RS1544

GSW® Rear Projection Black is an almost transparent projection window film in combination with a standard projector or beamer that projects beautiful HD images during the day, evening and in the dark.

Features:

Ideal for Advertising & Window Display.
Bars & Clubs.
Theatre, Life events & Trade fairs.
Theme Parks & Attractions.
For flat glass & arcylate.
Available per m1.



PRODUCT PERFORMANCE	
UV protection	99%
Light transmission	21%
Neffel effect	98
Viewing angle °	150
Contrast	500:1
Function	Natural color expression.

UV	99%
LTA	21%

Warranty	10 jaar
Installation	Inside
Foil colour	Black

SPECIAL

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com

Rear Projection Black

Special

SKU: RS1544

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	!
Reflective tinted single pane	!
Clear double pane	!
Tinted double pane	!
Reflective tinted double pane	!
Gas-filled double pane - Low E	!
Stadip ext. clear double pane	no
Stadip int. clear double pane	no
Triple glazed	no
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	30 meters
Film thickness	100 μ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to +40 °C
Fire class	EN13501-1
Manufacturer	

***Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

U-value


The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

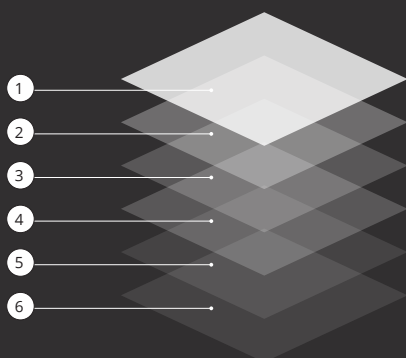

1. Hard scratch-resistant mat layer for long life and ease of maintenance when cleaning the windows.
2. Optically high quality Polyester.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation.

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE