



Matte Frosted Static

Privacy

SKU: RA1227

GSW® Matte Frosted Static frosted window film offers total privacy, inside and out. The solution for temporary privacy protection.

Features:

Ideal against prying eyes during the day and in the evening.

A solution for temporary or permanent without adhesive system.

Creates an attractive appearance on the facade.


Easy to install static window film.

Allows diffuse light to pass through.

Etched Mat look.



PRODUCT PERFORMANCE	
UV protection	75%
Light transmission	76%
Reflection of visible light outside	15%
Reflection of visible light inside	15%
Reflection of solar energy	10%
Absorption of solar energy	17%
Transmission of solar energy	73%
Reduction of reflection	20%
Sun transmission	81%
Rejected solar energy single glazing	18%
Rejected solar energy double glazing	19%
G-value	0.77
U-value single	5.6
U-value double	
Shade coefficient	

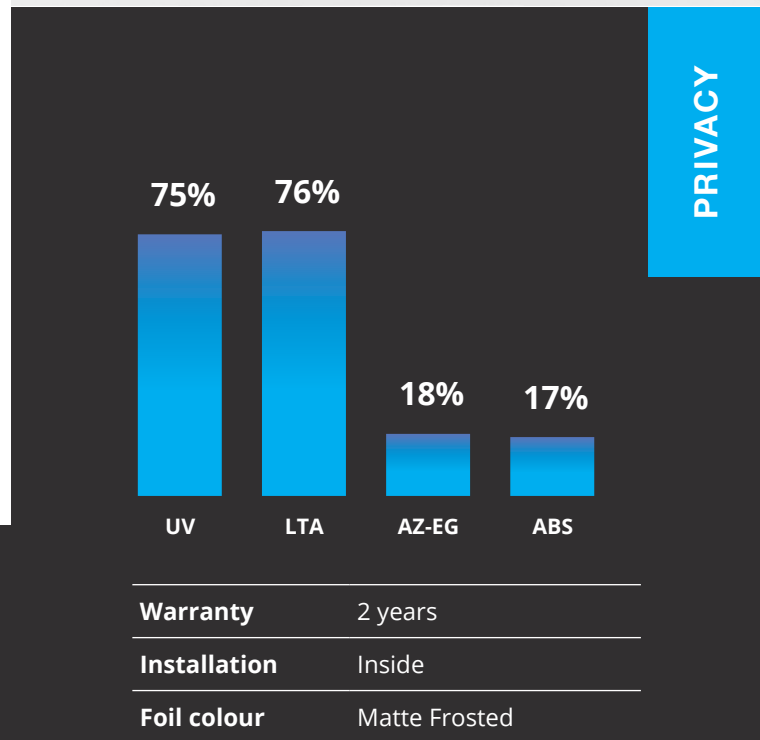

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com

Matte Frosted Static

Privacy

SKU: RA1227

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	Yes
Stadip ext. clear double pane	Yes
Stadip int. clear double pane	Yes
Triple glazed	Yes
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	122 cm
Length(s)	50 meters
Film thickness	100 µ
Material	PVC/PET
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	

***Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!



1. Hard scratch-resistant mat layer for long life and ease of maintenance when cleaning the windows.
2. Matt Monomer PVC.
3. Static.
4. Paper that can be digitally cut and thrown away after installation.

PROFESSIONAL WINDOWFILM
VISIT [GSWFILM.COM](https://www.gswfilm.com)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE