



# Safety 2 Mil Clear

Car window film

SKU: RV1571

GSW® Safety 2 Mil Clear crystal clear film has a burglar-retardant effect on tempered glass such as cars, commercial, construction and vessels.

**Features:**

**Helps prevent injury and delays impact during burglary attempts.**


**Good blow-dryable advice Plexus® Spray.**

**Delayed discoloration of your interior.**

**For an excellent view without distortions.**


**Blocks 99% UV.**

**Radio and GPS friendly.**

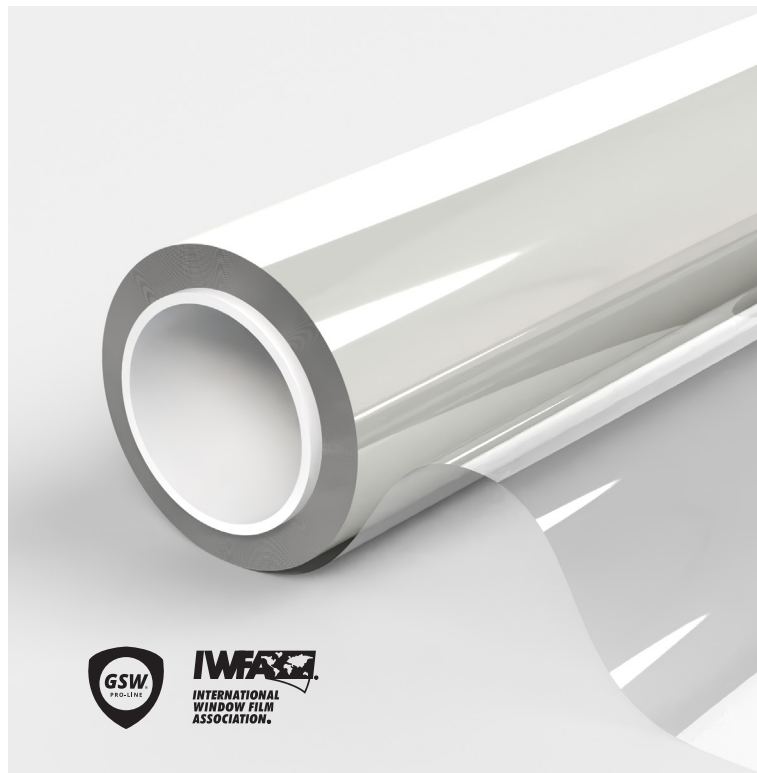

**PRODUCT PERFORMANCE**

UV protection	99%
Light transmission	87%
Reflection of visible light outside	11%
Reflection of visible light inside	11%
Reflection of solar energy	8%
Absorption of solar energy	9%
Transmission of solar energy	83%
Reduction of reflection	9%
Sun transmission	98%
Rejected solar energy single glazing	2%
Rejected solar energy double glazing	2%
Infrared rejection (760-2500 nm)	-

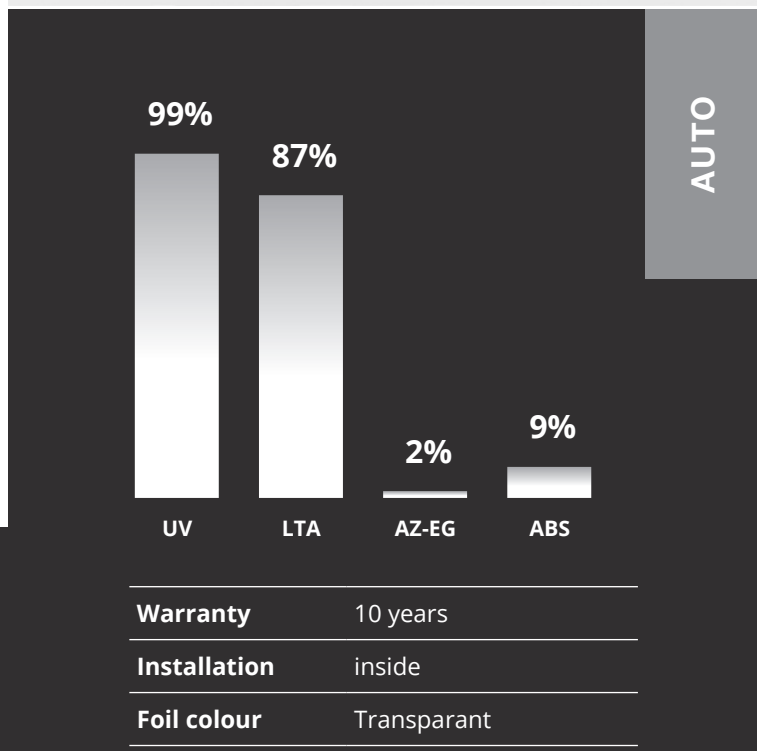

**PROFESSIONAL WINDOWFILM  
VISIT GSWFILM.COM**

Contact sales +31 (0)299-323122 [info@gswfilm.com](mailto:info@gswfilm.com)



# Safety 2 Mil Clear

Auto raamfolie

SKU: RV1571

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	Yes
Stadip ext. clear double pane	Yes
Stadip int. clear double pane	Yes
Triple glazed	Yes
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	30 meters
Film thickness	2 Mil
Material	Polyester
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	Distributor Global® Window Films

**\*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

## Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

## Supershrink

GSW® auto window films are made with Shrink substrates and patented anti-static technology for effortless drying shrink and faster, cleaner installations. Exterior PET protective layer from 270° degrees with digital Heatgun.

## Plotter friendly

GSW® window films are an ideal choice for tinters who use a plotter to cut vehicle patterns. They cut easily thanks to the specially designed antistatic protective layer.

## Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!



1. Hard scratch-resistant layer for a long life and ease of maintenance when cleaning the windows.
2. Colored polyester without optical distortion, with metal particles against IR radiation.
3. Self-adhesive hybrid glue, polymerization with glass within 15 days.
4. Protective film, disposable after installation.

**PROFESSIONAL WINDOWFILM**  
**VISIT [GSWFILM.COM](http://GSWFILM.COM)**

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (\*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW

Glass Solution Windowfilm B.V. Schepnetstraat 3a, 1446 AL Purmerend +31 (0)299-323 122 [info@gswfilm.com](mailto:info@gswfilm.com)



**FREE SAMPLE**

AUTO

V08/05/25