



Safety Emergency Glazing film


Safety film

SKU: RV0501

Transparent self-adhesive film for fast, safe and temporary repair of broken glass panes. The film covers the damaged glass surface without the need for tools and reduces the risk of injury from glass splinters. Ideal for emergency repairs.

Features:

- Quick installation without tools.**
- No risk of injury from glass splinters.**
- Weatherproof sealing against external influences.**
- Suitable for insulating glass units.**
- Transparent film with high light transmission.**
- Almost invisible.**

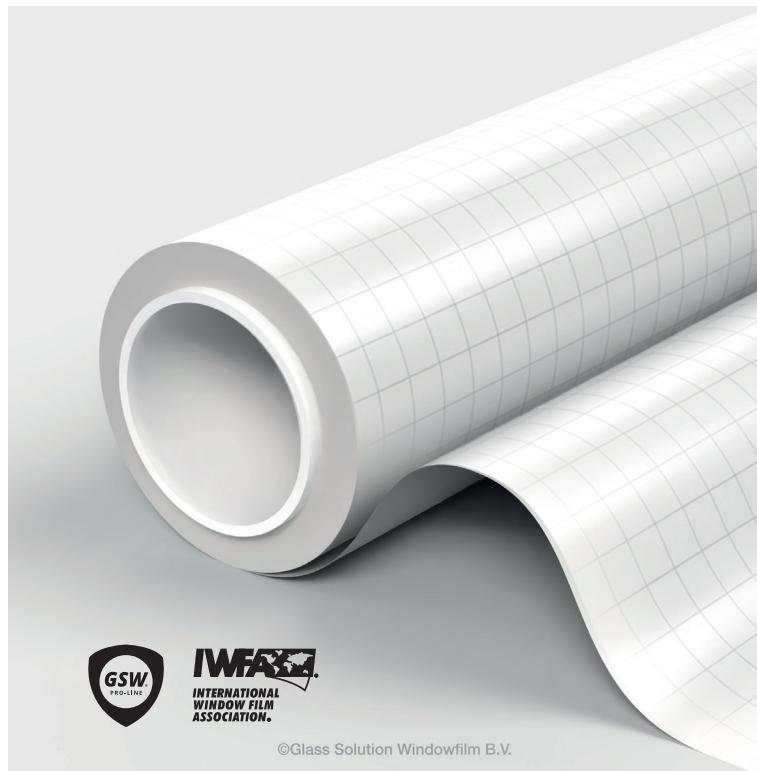

©Glass Solution Windowfilm B.V.

SAFETY

PRODUCT PERFORMANCE

UV protection	
Light transmission	80%
Reflection of visible light outside	
Reflection of visible light inside	
Reflection of solar energy	
Absorption of solar energy	
Transmission of solar energy	
Reduction of reflection	
Sun transmission	
Rejected solar energy single glazing	
Rejected solar energy double glazing	
G-value	
U-value single	
U-value double	
Shade coefficient	

80%



UV LTA AZ-EG ABS

Warranty vertical	
Warranty horizontal	
Installation	Inside and Outside.
Foil colour	Transparent
Fire class	

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com



Safety Emergency Glazing film

Safety film

SKU: RV0501

GLASS TYPES	SUITABLE
Clear single pane	
Tinted single pane	
Reflective tinted single pane	
Clear double pane	
Tinted double pane	
Reflective tinted double pane	
Gas-filled double pane - Low E	
Stadip ext. clear double pane	
Stadip int. clear double pane	
Triple glazed	
Acrylic 4 mm	
Polycarbonate 4 mm	


PRODUCT FEATURES	
Width(s)	30 cm, 51 cm
Length(s)	30 meters
Film thickness	175 μ
Material	Polyester
Storage period	1 year
Storage temperature	8 °C tot +20 °C
Fire class	
Manufacturer	

Installation

Maintenance

U-value

The lower the U-value, the better the thermal resistance of the window film, meaning less heat is lost to the outside.

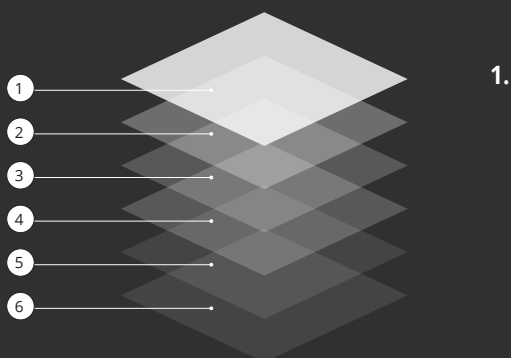

PROFESSIONAL WINDOWFILM
VISIT **GSWFILM.COM**

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW

Glass Solution Windowfilm B.V. Schepnetstraat 3a, 1446 AL Purmerend +31 (0)299-323 122 info@gswfilm.com



FREE SAMPLE

SAFETY

V12/01/26