



Matte White Light

Privacy

SKU: RA1519

GSW® Matte White Light frosted window film offers partial privacy, allows a lot of light to pass through from inside and outside. The window film has a White Matte glass effect and the natural light is largely filtered, creating a subtle ambient light.

Features:

Ideal against prying eyes during the day and in the evening.


Partial view from inside to outside.

Creates an attractive appearance on the facade.

Glass gets a longer lifespan.


Allows a lot of diffuse light to pass through.

Matte white look.

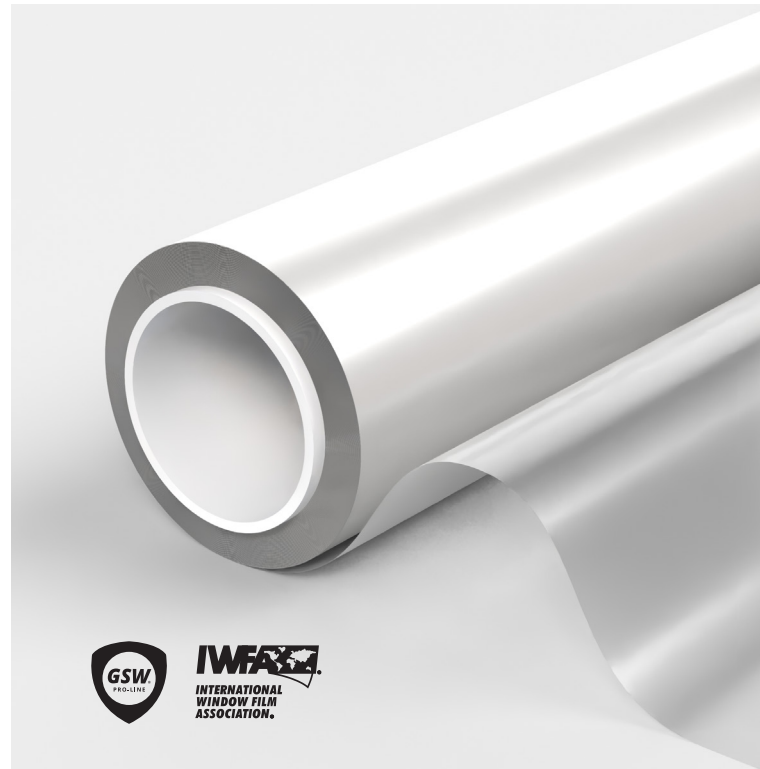

PRODUCT PERFORMANCE

UV protection	99%
Light transmission	78%
Reflection of visible light outside	11%
Reflection of visible light inside	10%
Reflection of solar energy	10%
Absorption of solar energy	10%
Transmission of solar energy	78%
Reduction of reflection	23%
Sun transmission	85%
Rejected solar energy single glazing	17%
Rejected solar energy double glazing	15%
G-value	0.71
U-value single	5.6
U-value double	
Shade coefficient	0.8

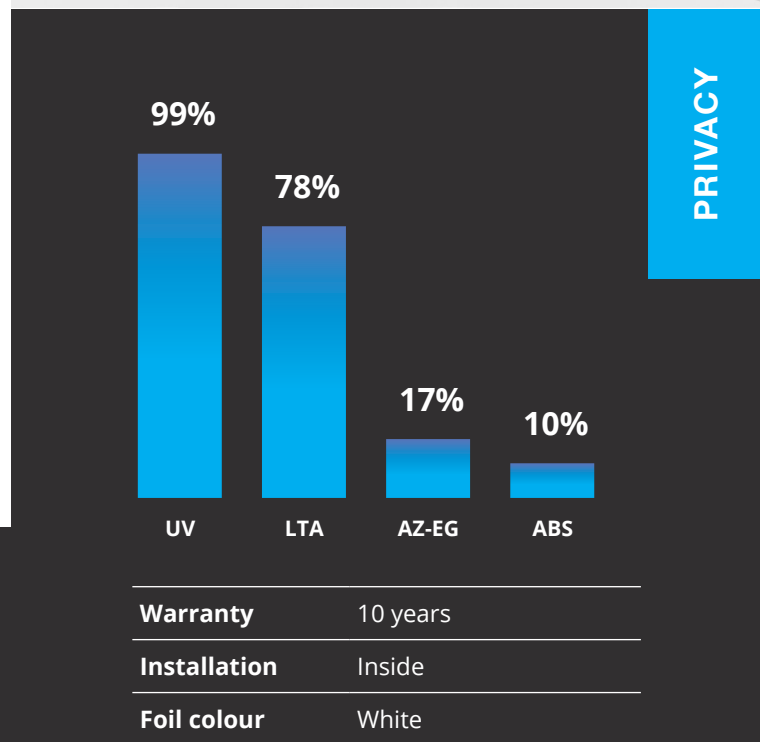

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

Contact sales +31 (0)299-323122 info@gswfilm.com

Matte White Light

Privacy

SKU: RA1519

GLASS TYPES	SUITABLE
Clear single pane	Yes
Tinted single pane	Yes
Reflective tinted single pane	Yes
Clear double pane	Yes
Tinted double pane	Yes
Reflective tinted double pane	Yes
Gas-filled double pane - Low E	Yes
Stadip ext. clear double pane	Yes
Stadip int. clear double pane	Yes
Triple glazed	Yes
Acrylic 4 mm	Yes
Polycarbonate 4 mm	no

PRODUCT FEATURES	
Width(s)	152 cm
Length(s)	30 meters
Film thickness	60 μ
Material	PET
Storage period	3 years
Storage temperature	-5 °C to '+40 °C
Fire class	EN13501-1
Manufacturer	

***Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

U-value

The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!



1. Hard scratch-resistant mat layer for long life and ease of maintenance when cleaning the windows.
2. Optically high quality Polyester.
3. Self-adhesive glue, glass polymerization within 15 days.
4. Protective film, disposable after installation

PROFESSIONAL WINDOWFILM
VISIT [GSWFILM.COM](https://www.gswfilm.com)

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW



FREE SAMPLE